

COVEO line

Above ground and underwater motors for automatic pool covers




SIREM SAS
3 Chemin du pilon
01700 Saint Maurice de Beynost
France
+33 478 558 300

www.sirem.fr

For which **pools?**


Above ground

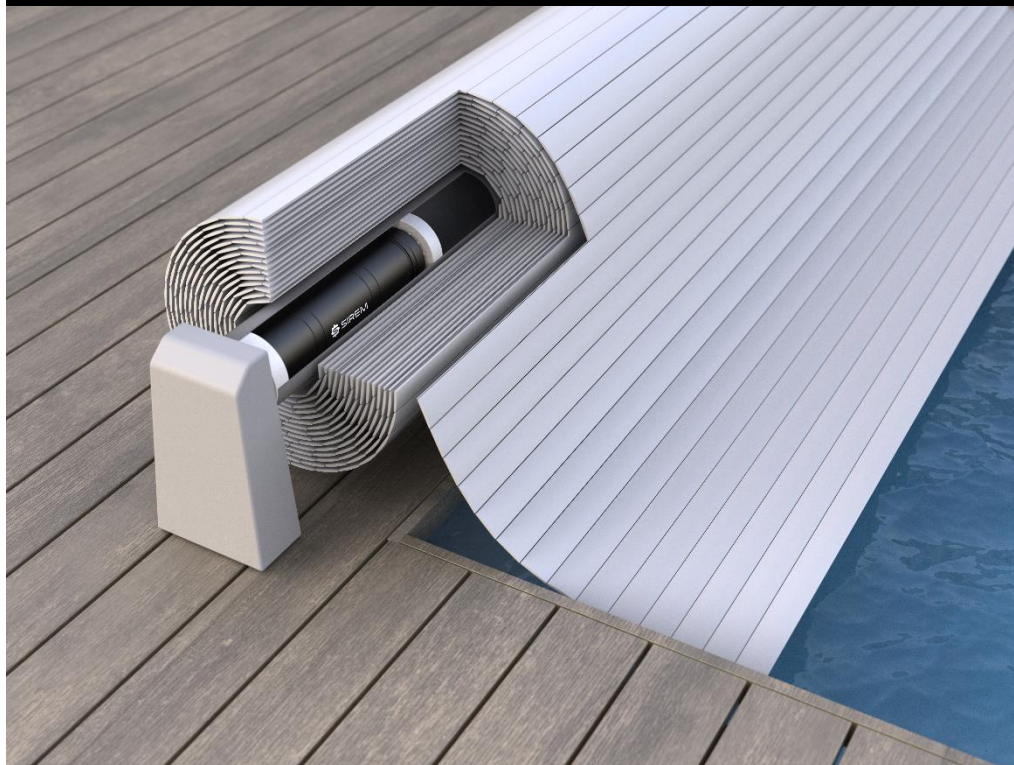

Underwater




Above ground

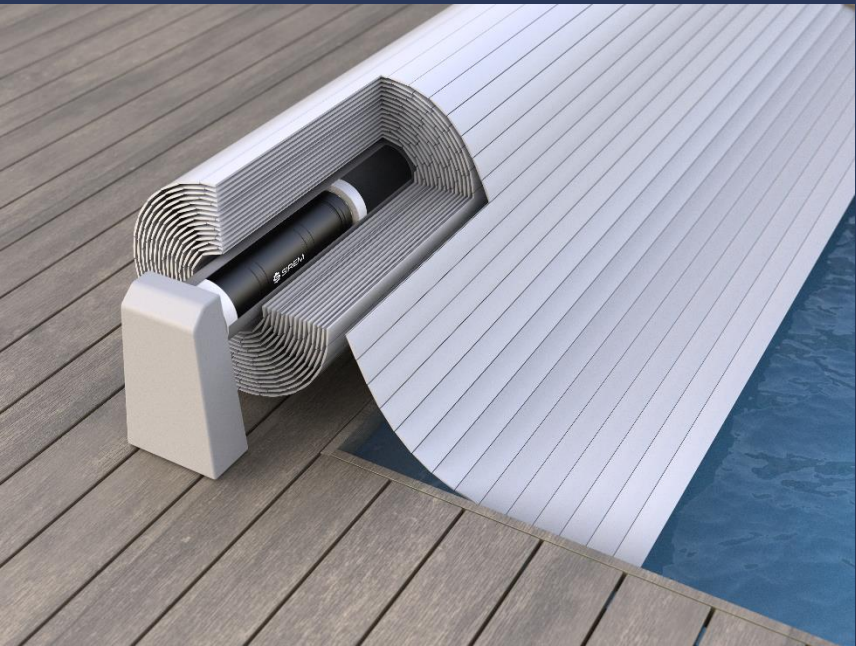

		POOL WIDTH									
		3 m	3,5 m	4 m	4,5 m	5 m	5,5 m	6 m	6,5 m	7 m	7.5m
POOL LENGTH	4 m										
	6 m	Motorization HS 80									
	8 m				Motorization HS 120						
	10 m							Motorization HS 200			
	12 m										
	14 m										
	18 m										
	20 m										



Above ground

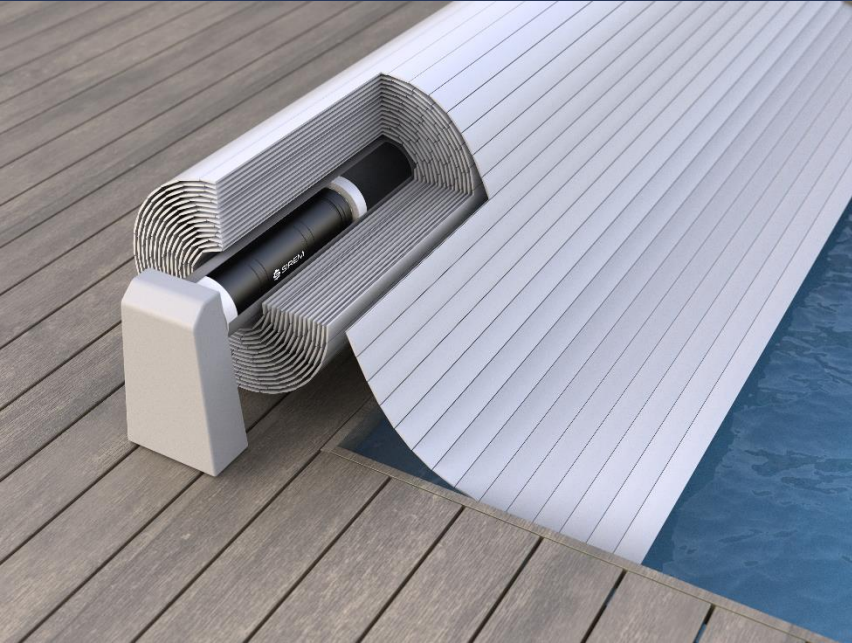


HS120-200

- Ø106mm
- Electronic limit switches,
- Designed for pools up to 6m x 15m,
- IP X5 waterproof class.



Above ground


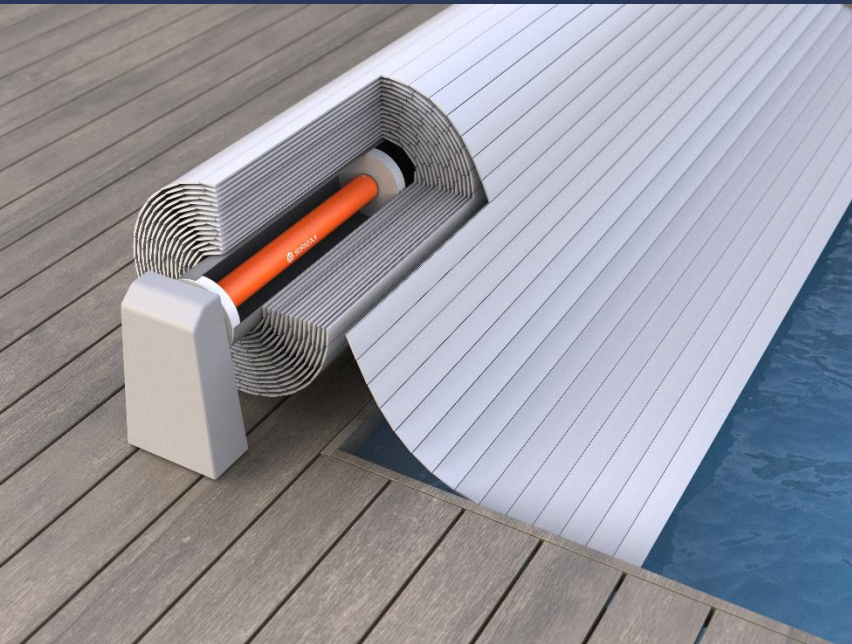


HS80


- Ø60mm
- Mechanical limit switch,
- Above-ground pool cover motorization,
- Designed for pools up to 4m x 8m,
- IP X5 waterproof class.



Above ground

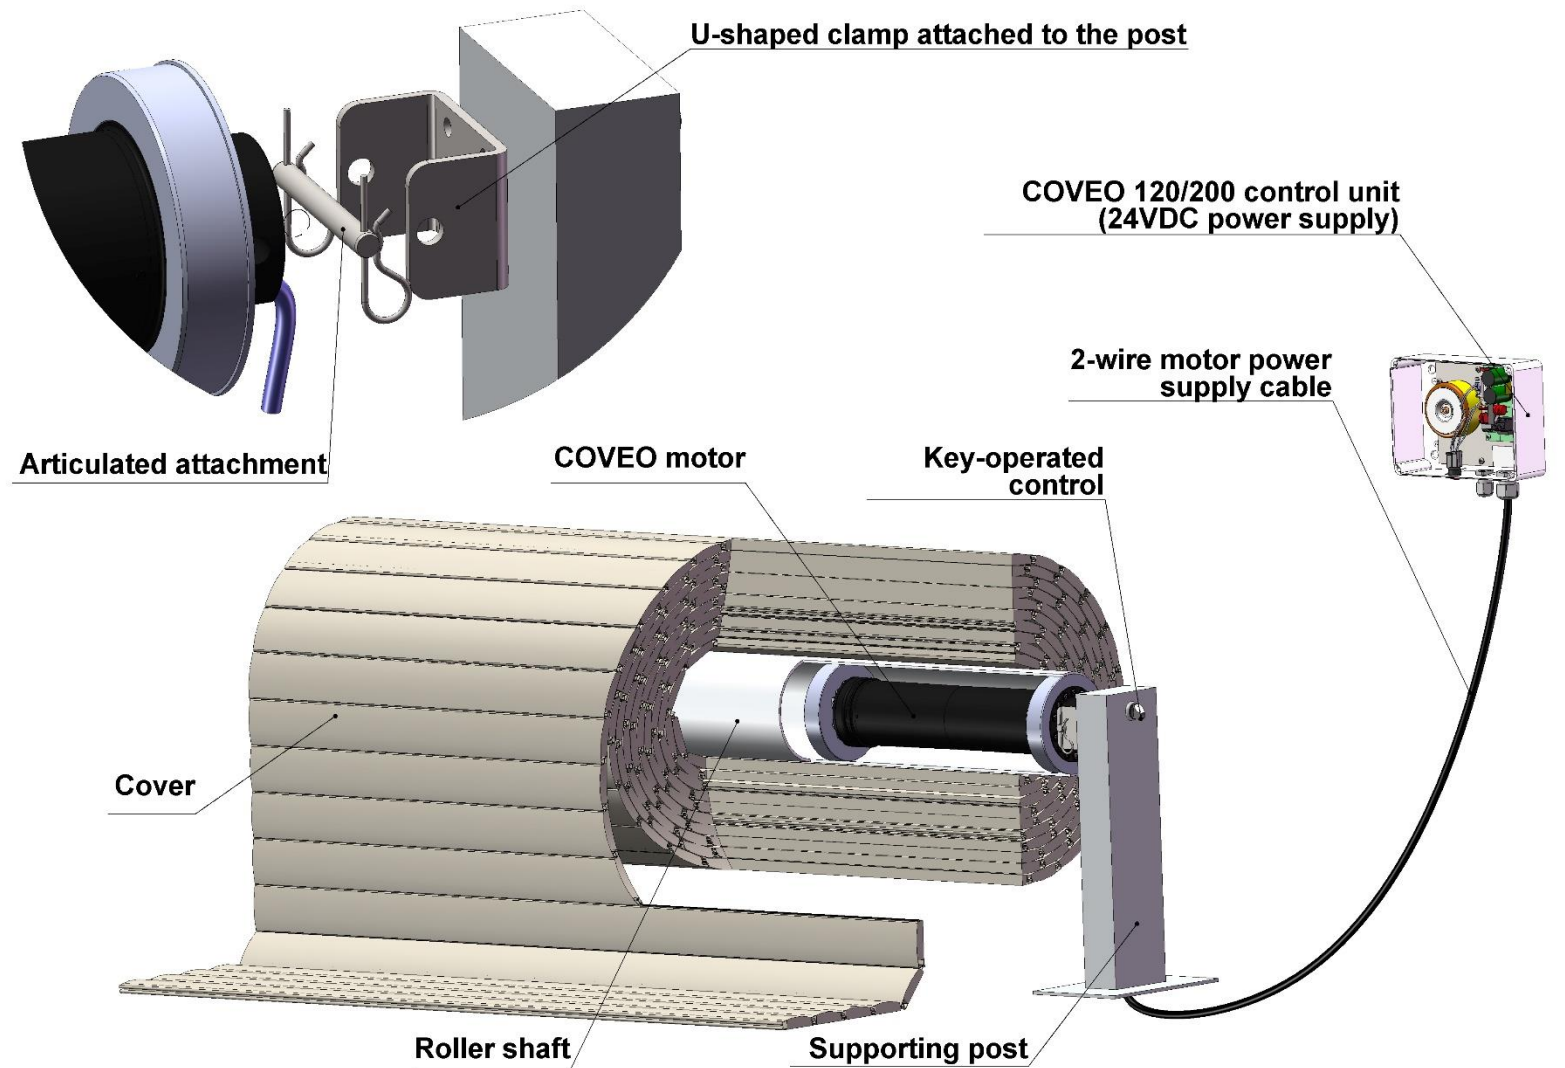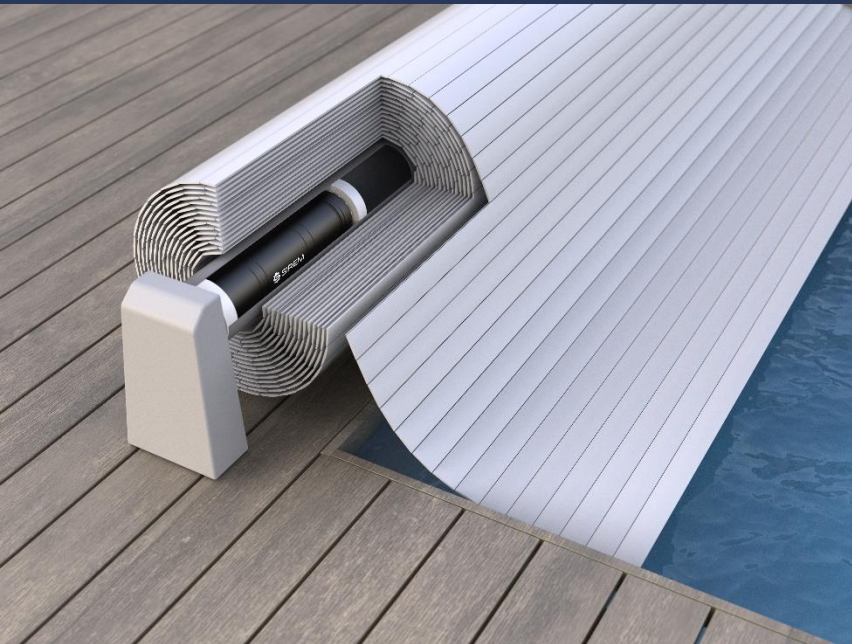

Underwater

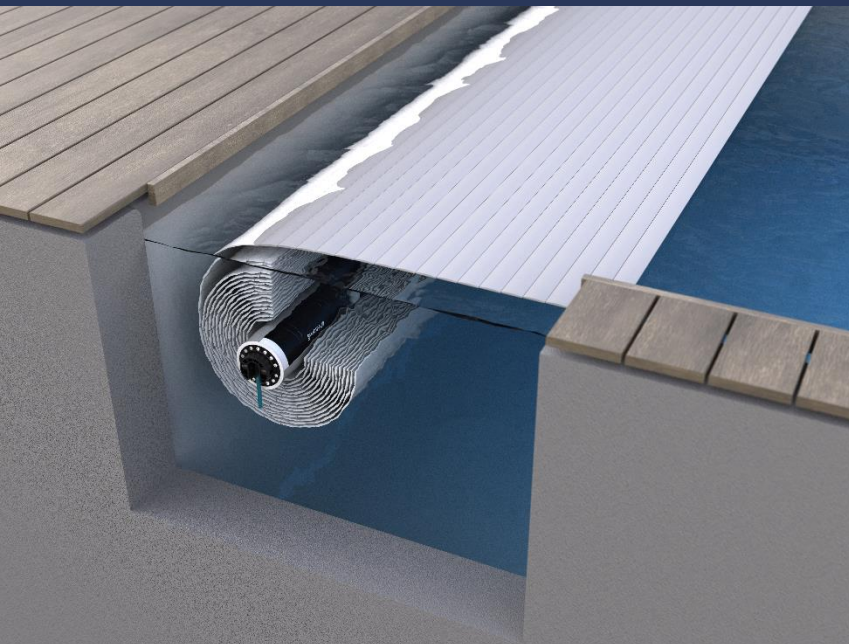


3 Chemin du Pilon | 01700 St Maurice de Beynost
FRANCE | +33 478 558 300 | www.sirem.fr

Immersion
depth of the
shaft = 0,5 m

Immer- sion depth of the shaft = 0,5 m		POOL WIDTH									
		3 m*	4 m*	4.5 m*	5 m*	5.5 m*	6 m**	6.5 m**	7 m**	7.5 m**	8 m**
POOL LENGTH	4 m										
	6 m										
	8 m		Motorization 120 N.m								
	10 m										
	12 m						Motorization 300 N.m				
	14 m										
	18 m										
	20 m										

		POOL WIDTH								
		3 m*	4 m*	4,5 m*	5 m*	5,5 m*	6 m**	6,5 m**	7 m**	7,5 m**
IMMERSION DEPTH OF THE SHAFT	0,5 m	L : 14 m 120 N.m	L : 14 m 120 N.m	L : 11 m 120 N.m	L : 9 m 120 N.m	L : 7 m 120 N.m	L : 20 m 300 N.m	L : 17 m 300 N.m	L : 15 m 300 N.m	L : 12 m 300 N.m
	1 m	L : 20 m 300 N.m	L : 20 m 300 N.m	L : 20 m 300 N.m	L : 15 m 300 N.m	L : 12 m 300 N.m	L : 14 m 300 N.m	L : 12 m 300 N.m	L : 10 m 300 N.m	L : 8,5 m 300 N.m
	1,5 m	L : 18 m 300 N.m	L : 18 m 300 N.m	L : 13 m 300 N.m	L : 10 m 300 N.m	L : 8 m 300 N.m	L : 8,5 m 300 N.m	L : 15 m 600 N.m	L : 15 m 600 N.m	
	2 m		L : 12 m 300 N.m	L : 8 m 300 N.m	L : 20 m 600 N.m	L : 15 m 600 N.m	L : 15 m 600 N.m	L : 12 m 600 N.m	L : 12 m 600 N.m	
	2.5 m				L : 15 m 600 N.m	L : 12 m 600 N.m	L : 12 m 600 N.m			
	3 m				L : 12i m 600 N.m					

Underwater


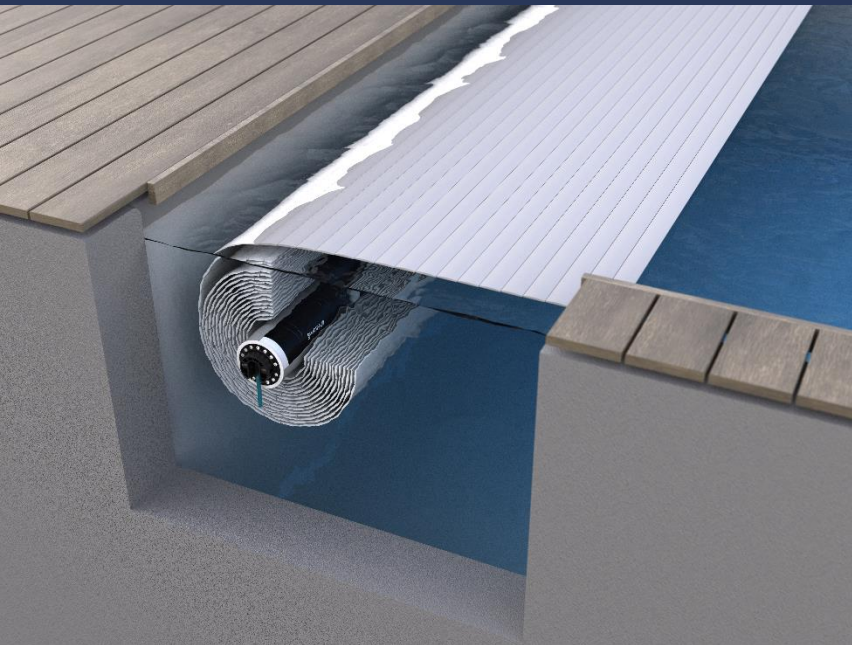


HS120-300-600

- Ø106mm,
- Automatic limit switch management,
- Customized flange dimensions,
- IP 68 waterproof class.



Underwater

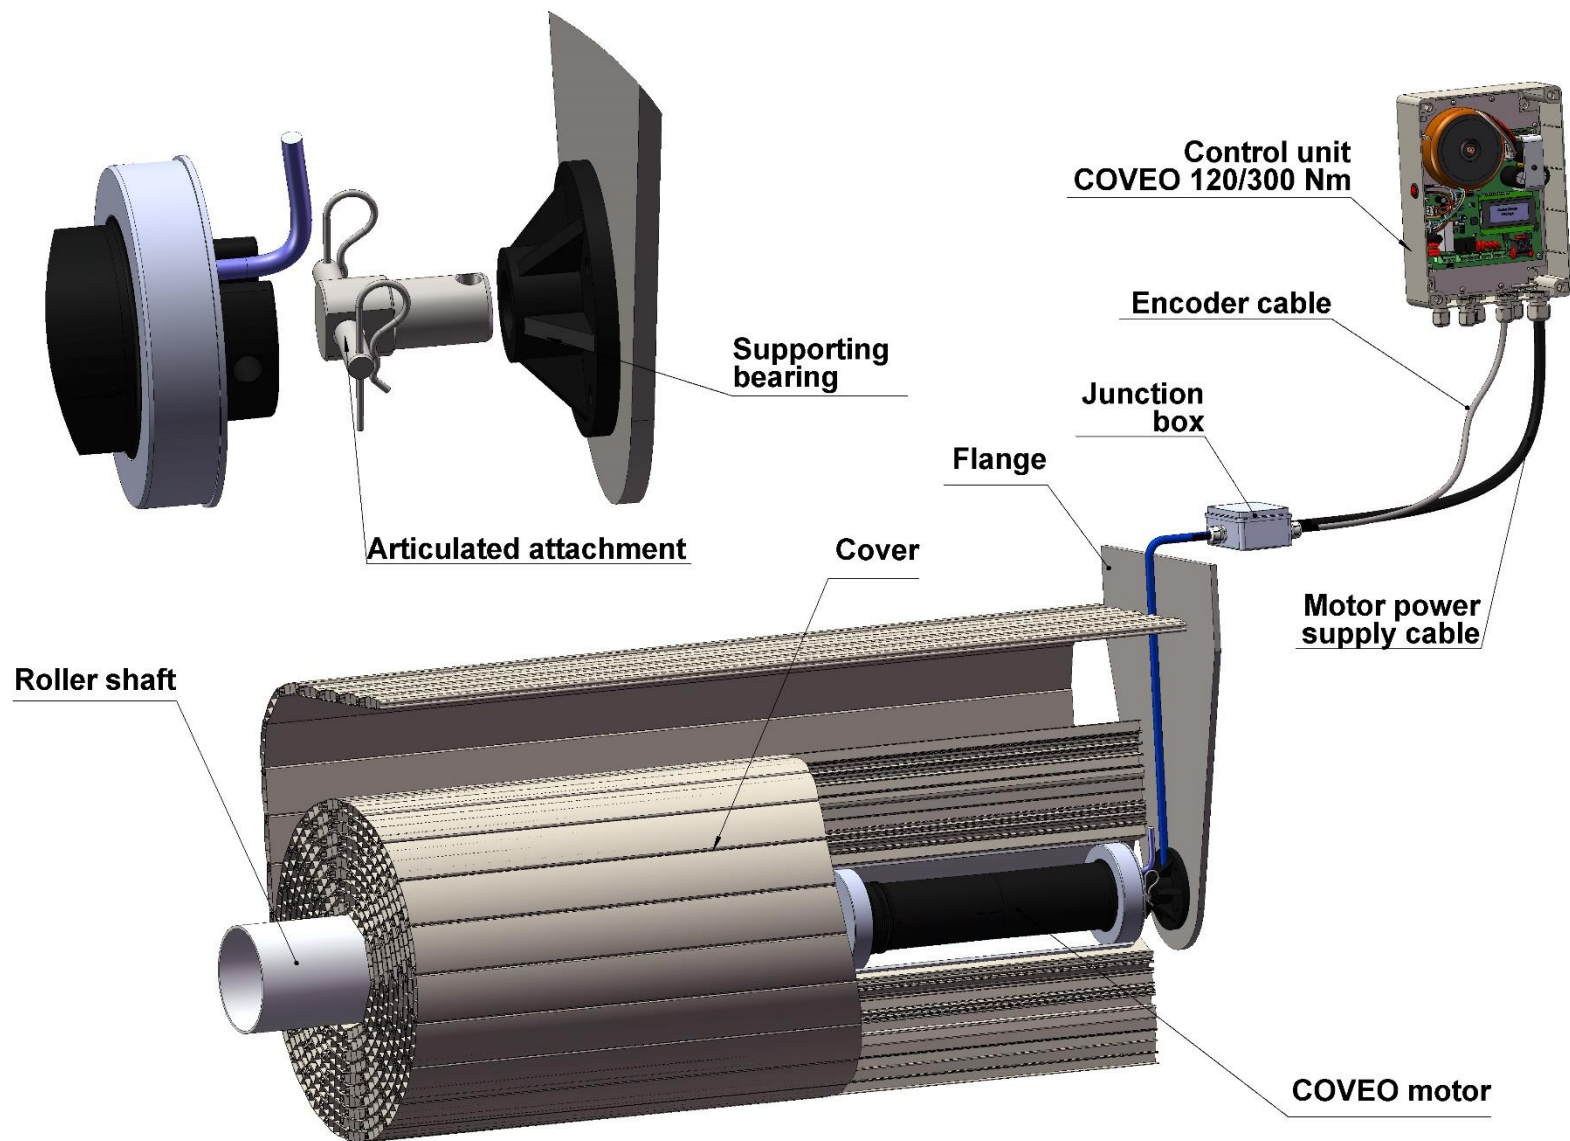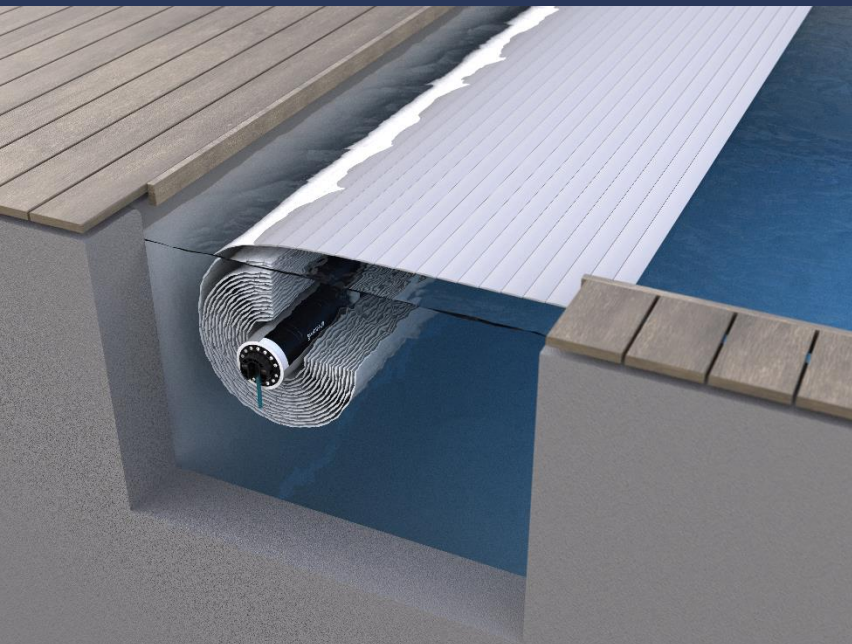

Under water Control box 4020



3 Chemin du Pilon | 01700 St Maurice de Beynost
FRANCE | +33 478 558 300 | www.sirem.fr

Simplified deployment > To get your customers on board



- International (7 languages including French, English, German Spanish...)
- An interface that is easy to understand and use (the first control box with a touch screen!)
- Quick trilingual installation guide (DE, FR, UK) included in the box

Practical > The function advantages



- Compatible with all SIREM immersed motors (new and old models + 600Nm)
- “Cleaning” mode (no loss of the limit switch positions)
- Adjustable closing speed
- “Gentle” mode at end of opening (perceived quality)
- Pluggable terminals

Service management > Enable the pool to manage itself



- Displays number of cycles (service data)
- Simplified technical assistance (QR code > dedicated web page)
- Simple transition from V2.2 to the 4000 (same housing)