


Product specifications
COVEO 120Nm or 200Nm above-ground motor for automatic pool covers.

DISTRIBUTION	
NAME	Department/Function
	Sales and Marketing
	Customers

Release management	
Version	Description of the upgrade
00	Creation
01	
02	
03	

CONTENTS

1.	Purpose of the product.....	2
1.1.	How it works:	2
1.2.	Control	2
1.3.	Environment.....	3
1.4.	Using the COVEO:	3
1.4.1.	Size of the pool.....	3
1.5.	Cross-section of the motor cable.....	3
2.	Product characteristics.....	4
2.1.	Product composition	4
2.2.	Space requirements	5
2.3.	Electromechanical characteristics	5
2.4.	Operation	6
2.4.1.	Connections:	6
2.4.2.	Initialisation procedure	7
2.4.3.	Regular operation:.....	7
2.4.4.	Notes:	7
2.4.5.	Safety	7
2.5.	Waterproofing	7
2.6.	Wiring recommendations.....	7
3.	Standards.....	8
4.	Product identification.....	8
	Warning.....	8
	Warning.....	9
	Declarations of compliance.....	10

		Above-ground COVEO 120/200 Nm						Written by:		Checked by:		Page	
								Name:		B. Maygron		E. Miralles	
Signature:													
File:		Product specifications											
11080		N°: MU-5089-1-030											
Vers	Date	Vers	Date	Vers	Date	Vers	Date						
00	20/12/2013	03		06		09							
01		04		07		10							
02		05		08		11							


1. Purpose of the product

This motor is designed to drive pool safety covers with ground-level drive shafts. It is mounted in the roller shaft and fulfils the following functions:

- rotating the shaft
- maintaining the shaft in position when it is stopped
- supporting the weight of the entire cover.
- The closed and open positions are controlled by the PCB built into the motor*.

*depending on the equipment.

1.1. How it works:

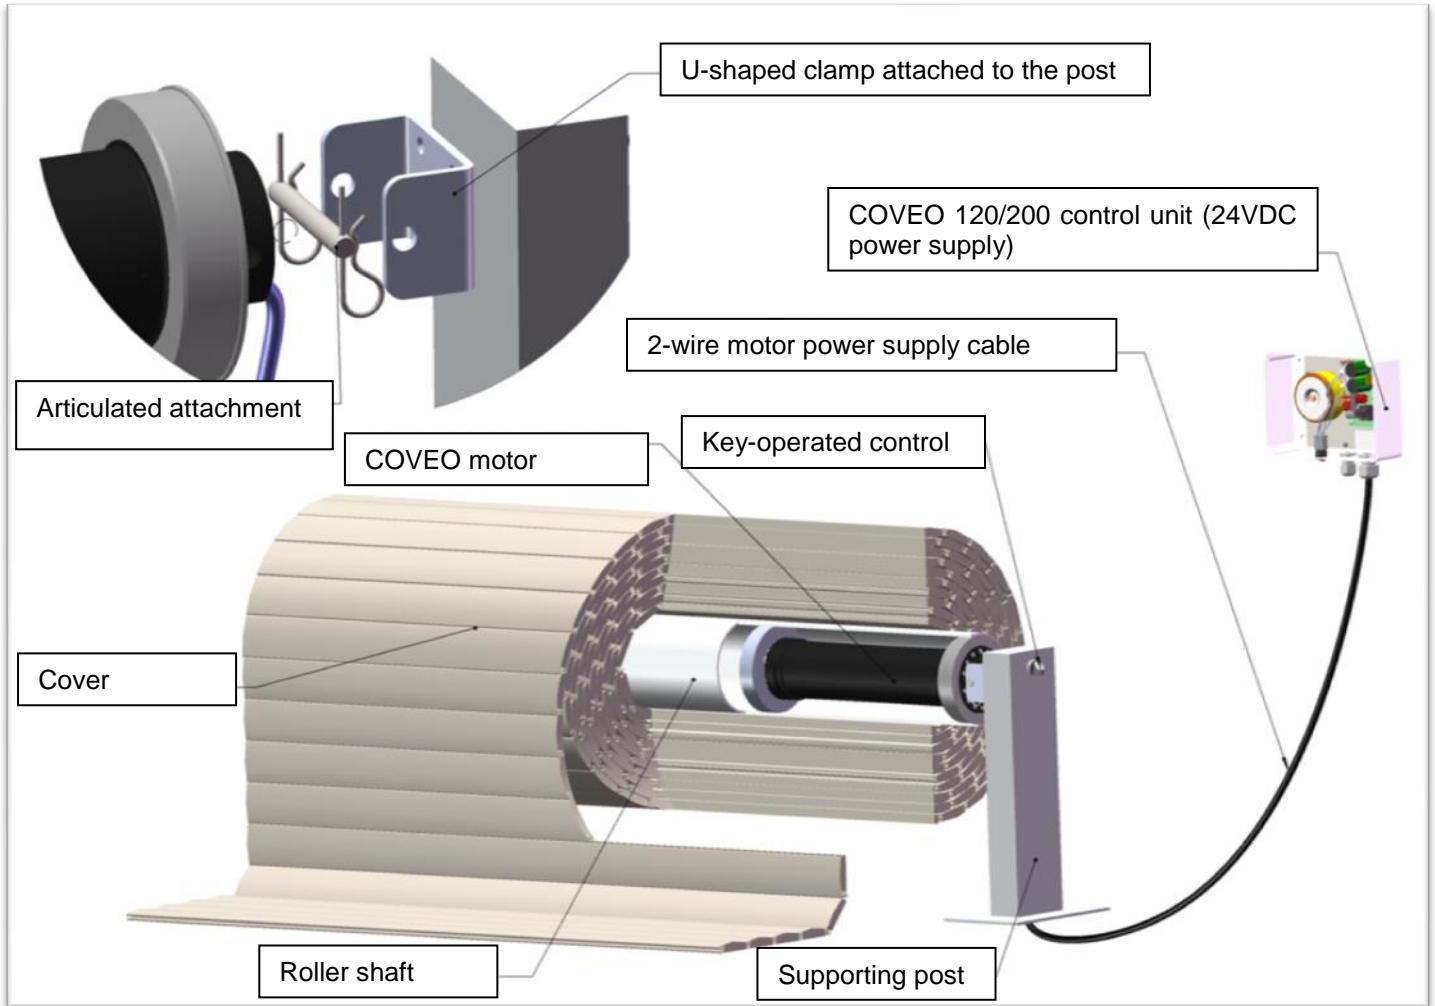

The force applied to the motor is taken up on the U-shaped flange by the supporting post (no dual articulation).


- ➔ The post must be sufficiently rigid to limit the bending of the roller shaft.
- ➔ The articulated attachment of this fixed shaft is horizontal. (see 2.1 diagram of the motor).

1.2. Control

The motor includes a rev counter PCB that controls the motor and the EOT switches.

A 24VDC power supply, a key-operated control (two NO switches) and a switch to set the board to programming mode (initialisation) must be connected to the motor. These switches are usually on the post.

The following low-voltage electrical standards must be respected: NFC15100, CEI60364. The control box must be installed outside volumes 0, 1 and 2.

		Above-ground COVEO 120/200 Nm						Written by:		Checked by:		Page
								Name:		B. Maygron		E. Miralles
Vers		Date		Vers		Date		Signature:		File:		
00		20/12/2013		03		06		09		11080		
01				04		07		10		Product specifications N°: MU-5089-1-030		
02				05		08		11				

1.3. Environment

- The temperature of the air during storage and operation: between -20°C and 40°C.

1.4. Using the COVEO:

1.4.1. Size of the pool.

Shaft height: 0.5m above the water		WIDTH OF THE POOL								
		4 m*	4.5 m*	5 m*	5.5 m*	6 m**	6.5 m**	7 m**	7.5 m**	8m**
LENGTH OF THE POOL	10 m									
	12 m		120Nm							
	15 m					200 Nm				
	18 m									
	20 m									

Note: 120N.m motors can be used for 6x12m pools with a more rigid tube (please contact us).

Data used to compile the table:

Cross-section of the roller shaft:

- *: Equivalent to that of an aluminium tube with an $\varnothing_{int}150 \times e=4$
- **: Equivalent to that of an aluminium tube with an $\varnothing_{int}150 \times e=10$

Characteristics of the cover:

- Weight of the blades: 40N/m²

This data is not guaranteed and can only be used for initial approximations. It cannot replace the user's experience. To be validated according to the type of blade, the type of shaft, the type of attachment, etc.

1.5. Cross-section of the motor cable

To guarantee that the motor turns sufficiently quickly, the drop in voltage between the supply unit and the motor must not exceed 2 Volts. The cross section of the wires in the motor power supply cable shall respect the recommended cross-sections according to the distance between the unit and the motor:

Coveo 120 Nm: (5A max)


Distance between the motor and the unit	10 m	20 m	30 m	40 m
Recommended cross-section	2.5 mm ²	2.5 mm ²	4 mm ²	6 mm ²

Coveo 200 Nm: (9A max)

Distance between the motor and the unit	10m	20m	30m	40m
Recommended cross-section	2.5 mm ²	4 mm ²	6 mm ²	8 mm ²

Linear resistance of the class 5 copper at 20°C: about 19 ohm.mm²/km

These cross-sections are for maximum usage of the product. They can be reduced if consumption is lower (please contact us).


		Above-ground COVEO 120/200 Nm						Written by:	Checked by:	Page
								Name:	B. Maygron	E. Miralles
								Signature:		
Vers	Date	Vers	Date	Vers	Date	Vers	Date	File:	Product specifications	
00	20/12/2013	03		06		09		11080		
01		04		07		10		N°: MU-5089-1-030		
02		05		08		11				


2. Product characteristics

2.1. Product composition

A COVEO is made up of a motorised waterproof IPX5 cartridge (120Nm or 200Nm), fitted with the following parts:


- drive and sliding bearings. These parts are mounted in the customer's roller shaft. This shaft and these bearings can be adjusted for an effortless installation. This adjustment is defined by the customer. The retaining screw can be removed to extract the bearings.
- The articulation shaft links the motor to the post, while allowing the motor to bend vertically. This shaft must be horizontal.

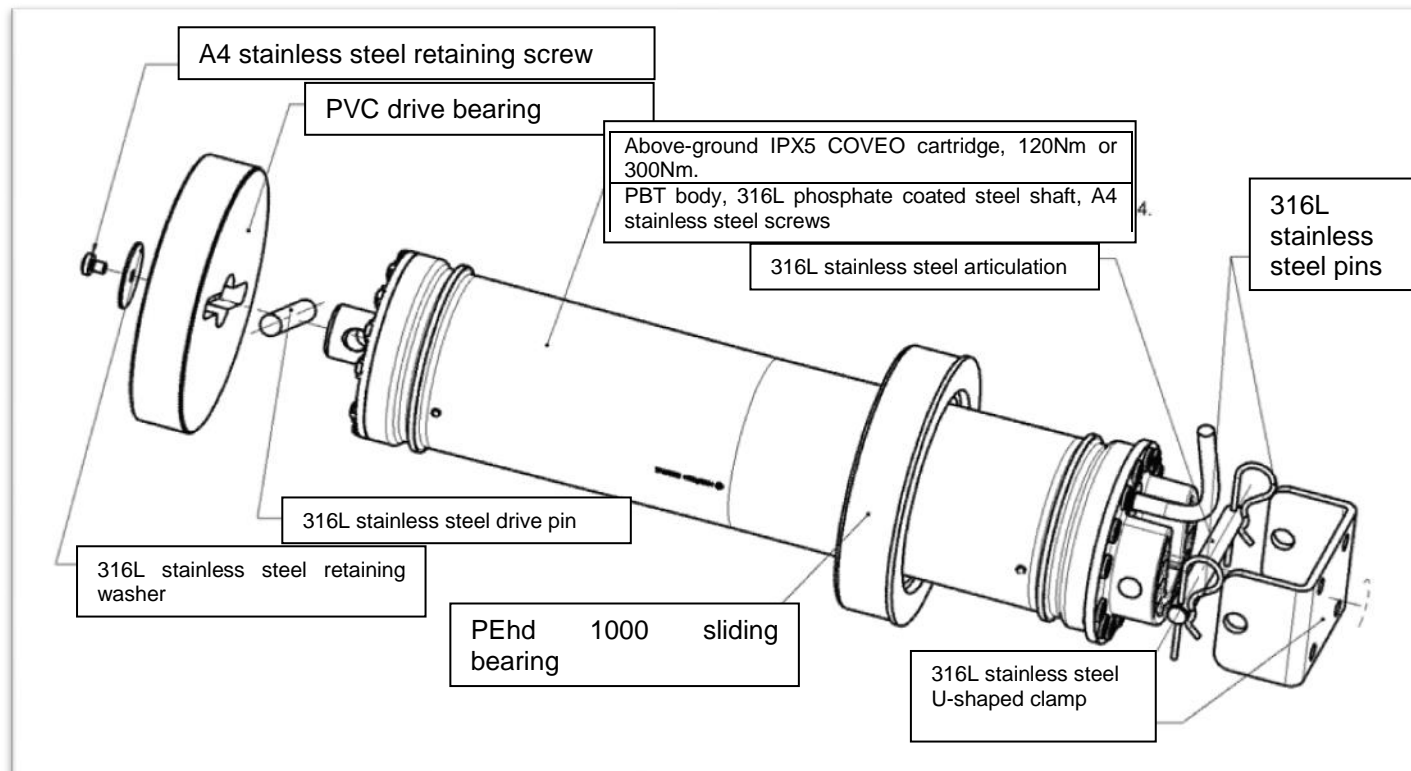

		Above-ground COVEO 120/200 Nm				Written by:		Checked by:		Page	
						Name: B. Maygron		E. Miralles		4/11	
Vers		Date		Vers		Date		Vers		Date	
00		20/12/2013		03				06		09	
01				04				07		10	
02				05				08		11	
File: 11080								Product specifications			
N°: MU-5089-1-030											

2.2. Space requirements

Standard space requirements plan of an above-ground COVEO motor.

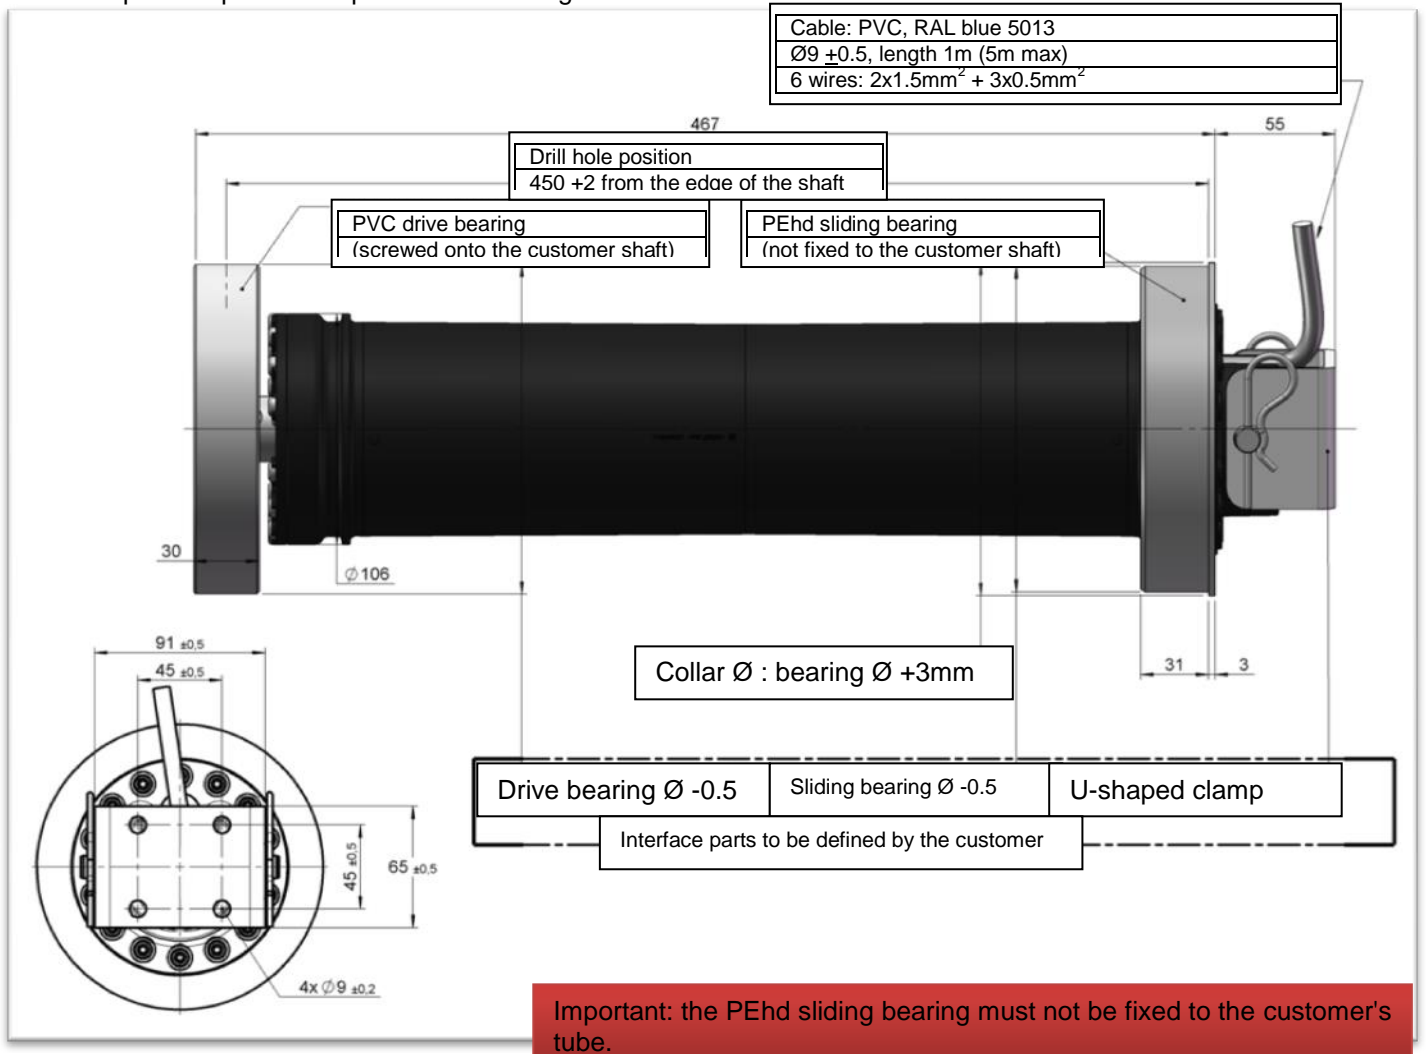

For reference:

The attachment to the post and the diameter and shape of the bearings may vary according to the customer's requirements. Each motor has a detailed space requirements drawing, validated by the customer.

2.3. Electromechanical characteristics

Characteristics of the immersed motors		120N.m	200N.m
Reduction ratio		1/886	1/630
Supply voltage of the SIREM unit		24Vdc (SELV<30Vdc)	24Vdc (SELV<30Vdc)
Consumption at max. torque ($\pm 20\%$)		5A	9A
Service: for the automatic cover roller, max. three successive cycles			
Max. torque		120N.m	200N.m
Speed ($\pm 20\%$)	Off load	5.5 rpm	6.5 rpm
	At max. torque	3 rpm	4 rpm
Motor shaft		Phosphate-coated and oiled steel (96h resistance to neutral salt mist)	
Materials	Cartridge	PBT	PBT
Control		Rev counter board, activated by the signals on the blue or white wires	
Magnetic brake (auto unlocking)		120N.m $\pm 10\%$ min.	200 N.m $\pm 10\%$ min.

		Above-ground COVEO 120/200 Nm						Written by:	Checked by:	Page
								Name:	B. Maygron	E. Miralles
Vers		Date	Vers	Date	Vers	Date	Vers	Date	File:	
00	20/12/2013	03		06		09			11080	
01		04		07		10			Product specifications	
02		05		08		11				
N°: MU-5089-1-030										

Soft cable	Diameter	$\varnothing 9 \pm 0.5$	$\varnothing 9 \pm 0.5$
	Composition	$2 \times 1.5 \text{ mm}^2 + 3 \times 0.5 \text{ mm}^2$	$2 \times 1.5 \text{ mm}^2 + 3 \times 0.5 \text{ mm}^2$
	Cable sealing (as per NFC15100)	AD8	AD8
Max. permissible load on the motor		6,000 N (1)	
Conditions of use	Period of use	6 months/year	
	Number of cycles/day	2	2
	Max. pool length in shaft revs	12 shaft revs (2)	15 shaft revs (3)
	Operating T° in the air	0°C – 50°C	

(1): Load never reached (see chapter 1.3)

(2): For a covered length of 14m (see chapter 1.3)


(3): For a covered length of 20m (see chapter 1.3)

Values for reference only

2.4. Operation

2.4.1. Connections:

The motor cable has six wires that are assigned as shown below.

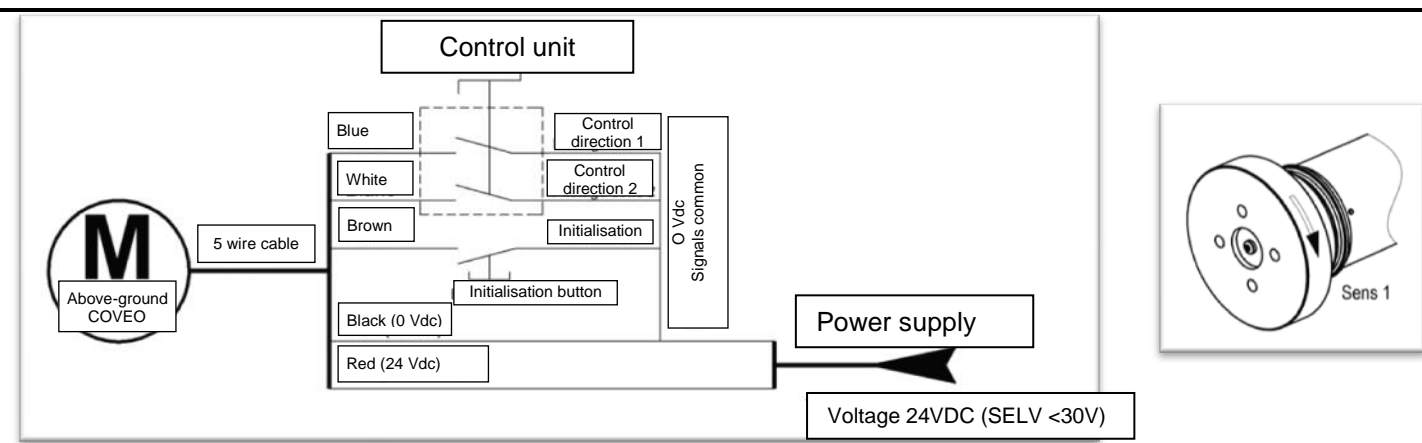

Connection in a waterproof junction box filled with gel or resin is compulsory.

		Above-ground COVEO 120/200 Nm				Written by:		Checked by:		Page	
						Name:		B. Maygron		E. Miralles	
Vers		Date		Vers		Date		Vers		Date	
00		20/12/2013		03				06		09	
01				04				07		10	
02				05				08		11	
								File:		Product specifications N°: MU-5089-1-030	
								11080			

Initialisation button:



Connections
Brown wire on the brown wire of the motor cable
Blue wire on the black wire of the motor cable (0V)

2.4.2. Initialisation procedure

The purpose of this step is to inform the rev counter board of where the closed and open positions of the pool are located. This step starts with the **pool in the closed position**.

- 1) Press the ini button for more than 3 seconds.
- 2) Open the cover.
- 3) Release the key. The initialisation is now complete.

2.4.3. Regular operation:

There are several modes of operation:

- Open and close by press-and-hold (default)*
- One-press opening, closing by press-and-hold
- One-press opening and closing

Only the first two modes of operation comply with chapter 10.1 of the standard NFP90-308, published in December 2006.

**Please contact us if use is different from the default mode.*

2.4.4. Notes:

- Depending on whether the motor is positioned on the left or the right of the pool, the "open" and "closed" switches are assigned to either the blue or the white wires.
- The motor is controlled by a 3-position switch (ON: OFF: ON)
- The key must be removed and stored after each operation.
- This key-operated switch is located in a fixed unit close to the pool.

The functions comply with the standard: **NF P90-308**

2.4.5. Safety


- Wait between two successive movements: 1s.
- Wait before starting after an input: 0.2s.
- The motor stops after uninterrupted operation lasting more than 10 minutes.
- If the power cuts out during initialisation, the configuration will be lost, and it is necessary to re-initialise.
- The open and closed positions are saved, even after a power cut.
- The motor rev counter board is fitted with a time-delay thermal fuse that maintains a current of 7A at 25°C and a thermal current of 13.2 A.
- A minimum voltage of 17VDC is required for the board to work correctly.

2.5. Waterproofing

The product is IPX5 waterproofed.

2.6. Wiring recommendations

The resistance of the board to atmospheric over voltages (lightning) is greater than the requirements of the standard (EN 61000-4-4 and EN61000-4-5). This value has been lab tested.

		Above-ground COVEO 120/200 Nm						Written by:	Checked by:	Page
								Name: B. Maygron	E. Miralles	7/11
Vers		Date	Vers	Date	Vers	Date	Vers	Date	File:	Product specifications
00	20/12/2013	03		06		09			11080	
01		04		07		10				
02		05		08		11				
N°: MU-5089-1-030										

This resistance threshold is capable of withstanding most lightning strikes. However, in view of the particular nature of climatic events and the complexity of the system, it is impossible to provide protection against all the over voltages that occur when lightning strikes.

In particular, if the power supply cable is long (more than, 15m), if the system is insulated and if storms are frequent in the region, protection against over voltages should be provided:

- a lightning rod on the 230V in the pool shelter where the power supply arrives, even if the main residence is already protected.
- In any case, high-capacity current sinks to the earth are required with an earth resistance of less than 10 ohms. For long distances, the earth connection may be installed separately in the pool shelter, in accordance with the regulations.

3. Standards

This product is designed to be incorporated in an automatic safety cover defined by the standard NFP 90308 (2006).

To this end, and in accordance with the European low-voltage directive 2006/95/EC, this motor complies with the following standards, when connected to the COVEO control unit 120/300:

- Immunity as per EN 55014-2:
- Emissions as per EN 55014-1 and EN 61000-6-3
- Electrical safety as per NF EN 60335-1

The electrical installation of these components (motor, unit, key unit, etc.) shall comply with the applicable standards: NFC15100, IEC60334 or the local country standards. It is up to the installers to respect or enforce these standards.

The SIREM control unit of the above-ground 120Nm and 200Nm COVEO systems supplies an SELV to the motor: safety extra low voltage <30Vdc as per NFC15100 or IEC 60364-7.

The control box must be installed outside volumes 0, 1 and 2.

4. Product identification

Manufacturer's plate on the motor cartridge.

The diagram shows a manufacturer's plate with the following fields and technical data:

- Product name:** Covéo 200 Hors sol
- Barcode:** [Barcode]
- Product code + incremental 4-figure number:** 094391630*000*
- Batch Number:** **/14/*****
- Technical data:**
 - Voltage/Tension : 24Vdc
 - Current/Intensité; max : 9A
 - Torque/Couple; max : 200Nm
 - Speed/Vitesse; min : 4tr-mn / max : 6.5tr-mn
 - Duty/Service : S3 10% de 60mn
 - N=1/630 IPX5
- Other:** Made in France, www.sirem.fr


		Above-ground COVEO 120/200 Nm						Written by:	Checked by:	Page
								Name:	B. Maygron	E. Miralles
Vers		Date	Vers	Date	Vers	Date	Signature:	Product specifications		
00	20/12/2013	03		06		09	File:	N°: MU-5089-1-030		
01		04		07		10	11080			
02		05		08		11				

Warning

Important: failure to follow these instructions can result in serious injury

- The drive bearing (inner bearing) is the only bearing fixed to the tube to drive the shaft. The outer bearing (the bearing that turns on the motor) is not fixed to the tube (customer shaft).
- Attachment by four $\varnothing 6$ max radial screws (M6 max or equivalent). Respect the max. drilling depths shown on the product drawing. It shall obey the rules of the art and follow the recommendations for use for the preparation of the attachment: \varnothing of the pre-drilling hole, min drilling \varnothing for plastic screws. (refer to the screw manufacturer's data)
- All operations on the electrical system must be performed by qualified and authorised specialised electricians.
- The motor controls must only be operated by adults. Prohibit children from using them.
- Cables are not to be used for handling purposes. Handle the cables with care.
- In the event of damage, immobilise the system until it has been repaired.
- Place the system out of order and switch off the power supply during services and maintenance operations, and whenever work is done on the motor.
- When installing, make sure that the electric cable cannot be damaged. If an electric power supply cable is damaged, only the manufacturer is authorised to replace it.
- Never drill or weld in the vicinity of the reduction gear.
- Always protect the electrical connections with an IP68 box, gel or resin.

SIREM does not provide any guarantees and declines all liability in the event of material or bodily harm caused by its products in the event of misuse, failure to follow instructions, changes to the products and the use of the motors with unauthorised accessories made by other manufacturers.

		Above-ground COVEO 120/200 Nm						Written by:	Checked by:	Page
								Name: B. Maygron	E. Miralles	9/11
								Signature:		
Vers	Date	Vers	Date	Vers	Date	Vers	Date	File:	Product specifications	
00	20/12/2013	03		06		09		11080		
01		04		07		10				
02		05		08		11				
N°: MU-5089-1-030										

Declarations of compliance



DECLARATION OF "CE" CONFORMITY

We declare our products, COVEO (swimming pool cover motorisation) and its electric panel control box to be manufactured according to the following manufacturing standards:

- IEC 60-335-1:** Household and similar electrical appliances - Safety - Part 1.
- NF EN 55014-1:** Electromagnetic compatibility - Requirements for household appliances, electric tools and similar apparatus - Part 1: Emission.
- NF EN 61000-6-3:** Electromagnetic compatibility (EMC) - Part 6-3: Generic standards - Emission standard for residential, commercial and light-industrial environments.

IEC-CEI

and to be conformed to the requirements of standards subject to being assembled in compliance with their intended :

- 2006/95/CE** Low voltage directive
- 2004/108/EC** Electromagnetic compatibility directive

ADDITIONAL INFORMATION:

These products' design allow them to be used as a component in an assembly covered by the application of the NF P90-308 standards: protections for non ground pools closed to private use individually or collectively (Safety covers and gripping).

Marking: CE on the nameplate.

Saint-Maurice-de-Beynost, 06/03/2014.

G. MALPHETTES
CEO

B. MIRALLES
Technical Director

D. PERRADIN
Quality Manager

Chemin du Pilon - Saint Maurice de Beynost - 01708 MIRIBEL Cedex - FRANCE - Tél. : +33 (0)4 78 55 83 00 - Fax : +33(0)4 78 55 89 54
S.A.S au capital de 3 525 520 euros - RCS Bourg en Bresse - SIREN 351 138 189 - Code APE 2711Z - N°TVA FR 48 351 138 189



		Above-ground COVEO 120/200 Nm						Written by:		Checked by:		Page	
								Name:		B. Maygron		E. Miralles	
Vers		Date		Vers		Date		Signature:		Product specifications			
00		20/12/2013		03		06		File:					
01				04		07		11080		N°: MU-5089-1-030			
02				05		08		11					



Compliance Declaration to the 2002/95/CE Directive

We certify that the below listed products are conform to the Directive:

RoHS 2002/95/CE OF THE EUROPEAN PARLIAMENT AND COUNCIL dated 27 January 2003

(Restriction on hazardous substances in electrical and electronic equipment)

Our Swimming Pool Cover Motorisations model: COVEO

Are free of:

- Lead (less than 0.1 % of the weight)
- Mercury (less than 0.1 % of the weight)
- Cadmium (less than 0.1 % of the weight)
- Chromium (less than 0.1 % of the weight)
- PBB, PBDE (less than 0.1% of the weight)

St Maurice de Beynost, 06-03-2014

Emmanuel MIRALLES
Technical Manager

Damien PERRADIN
Quality Manager

Chemin du Pilon – Saint Maurice de Beynost – 01708 MIRIBEL Cedex – FRANCE – Tél. : +33 (0)4 78 55 83 00 – Fax : +33(0)4 78 55 89 54
S.A.S au capital de 3 525 520 euros – RCS Bourg en Bresse – SIREN 351 138 169 - Code APE 2711Z – N°TVA FR 48 351 138 169



		Above-ground COVEO 120/200 Nm						Written by:	Checked by:	Page
								Name:	B. Maygron	E. Miralles
								Signature:		
Vers	Date	Vers	Date	Vers	Date	Vers	Date	File:	Product specifications	
00	20/12/2013	03		06		09		11080		
01		04		07		10				
02		05		08		11				
									N°: MU-5089-1-030	