

Product specifications
**COVEO 120Nm or 300Nm immersed motor for
automatic pool covers.**


DISTRIBUTION

NAME	Department/Function
	Sales and Marketing
	Customers

Release management	
Version	Description of the upgrade
00	Creation
01	
02	
03	

CONTENTS

1.	Purpose of the product.....	2
1.1.	How it works:	2
1.2.	Connection with the unit:	2
1.3.	Environment.....	3
1.4.	Using the COVEO:	3
1.4.1.	Size of the pool.....	3
1.4.2.	Immersion depth.....	3
1.5.	Cross-section of the motor cable.....	4
2.	Product characteristics.....	4
2.1.	Product composition	4
2.2.	Space requirements	5
2.3.	Electromechanical characteristics	6
2.4.	Operation	6
2.4.1.	Connections:	6
2.4.2.	Operating principle	7
2.4.3.	Operation.....	7
2.5.	Wiring recommendations.....	7
3.	Standards.....	8
4.	Product identification.....	8
	Warning.....	1
	Warning.....	9
	Declarations of compliance.....	10
	Declarations of compliance.....	10


		Immersed COVEO 120/300 Nm						Written by:		Checked by:		Page	
								Name:		B. Maygron		E. Miralles	
Signature:													
Vers	Date	Vers	Date	Vers	Date	Vers	Date	File:				Product specifications	
00	02/12/13	03		06		09		11080					
01		04		07		10		N°: MU-5088-1-030					
02		05		08		11							

1. Purpose of the product

This motor is designed to drive pool safety covers with immersed drive shafts. It is mounted in the roller shaft and fulfils the following functions:

- rotating the shaft
- maintaining the shaft in position when it is stopped
- supporting the load. Buoyancy of the entire cover.

1.1. How it works:

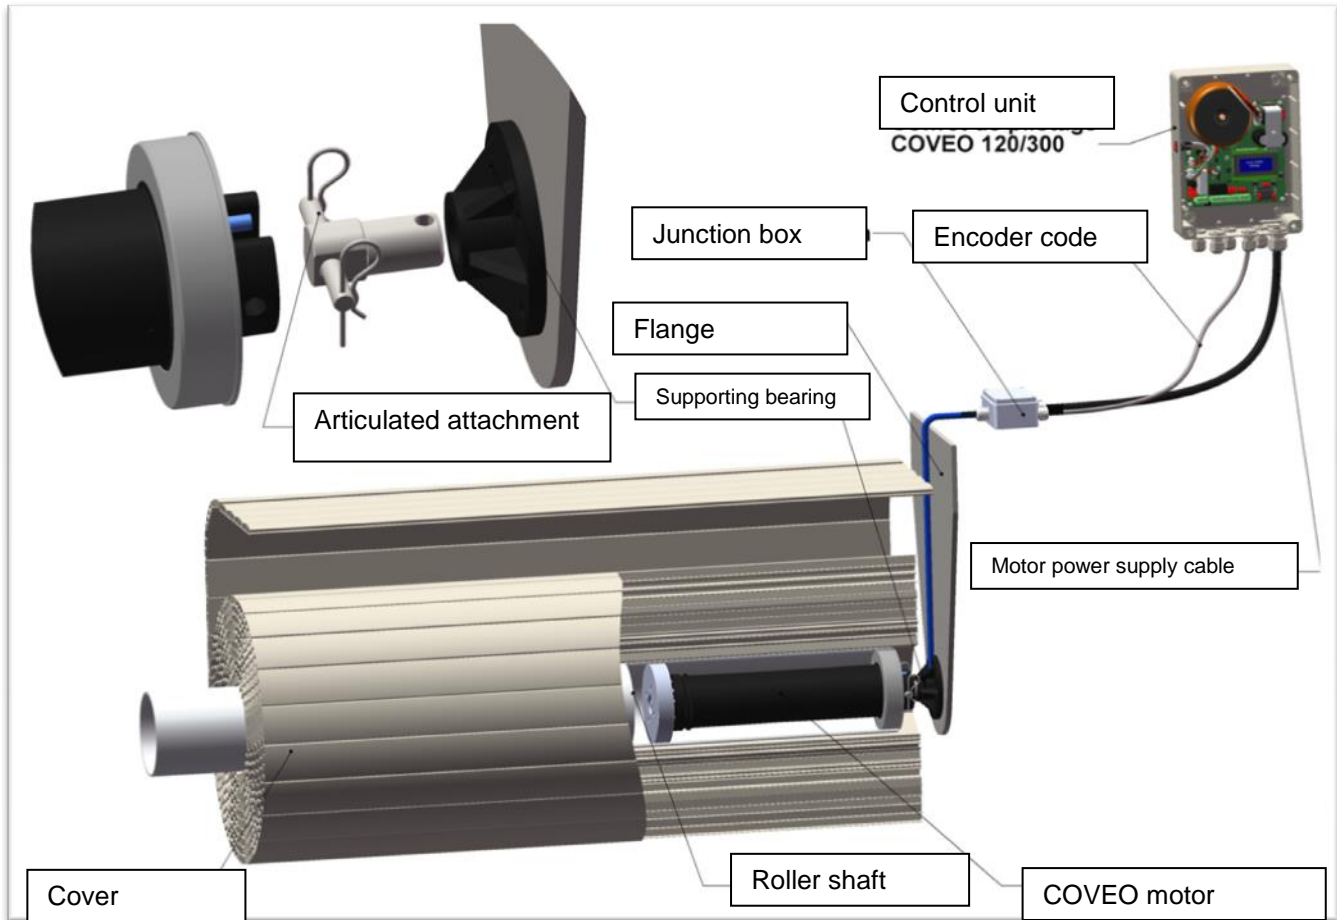

The force applied to the motor is taken up on the fixed shaft by the customer's supporting bearing (no dual articulation).

- ➔ The supporting bearing is sufficiently rigid to limit the bending of the motor's fixed shaft to 9°.
- ➔ The articulated attachment of this shaft is horizontal. (see 2.1 diagram of the motor).

The supporting bearing is fixed to a flange or directly sealed in the wall of the pool.


1.2. Connection with the unit:

The motor is controlled by the COVEO control unit that is connected to the motor by two cables:

- The motor cable: two conductors with the cross-section shown in the table below
- The sensor cable: four conductors, with a cross-section of at least 1.5 mm² Shielding that is correctly connected to the earth at one end is recommended for improved protection against atmospheric over voltages.

These cables and the COVEO motor cable are connected by a sealed and reliable system. Example: connection box with gel.

The following low-voltage electrical standards must be respected: NFC15100, CEI60364. The control box must be installed outside volumes 0, 1 and 2.

		Immersed COVEO 120/300 Nm						Written by:	Checked by:	Page
								Name:	B. Maygron	E. Miralles
Vers		Date	Vers	Date	Vers	Date	Signature:	Product specifications		
00	02/12/13	03		06		09	File:			N°: MU-5088-1-030
01		04		07		10	11080			
02		05		08		11				

1.3. Environment

- The temperature of the water must be between 0°C and +40°C.
- The temperature of the air during storage -20°C and 40°C.

1.4. Using the COVEO:

1.4.1. Size of the pool.

Immersion depth of the shaft = 0.5m (water level)		WIDTH OF THE POOL								
		3 m*	4 m*	4.5 m*	5 m*	5.5 m*	6 m**	6.5 m**	7 m**	7.5 m**
LENGTH OF THE POOL	0 m									
	7 m			120Nm						
	9 m									
	10 m									
	11 m									
	12 m									
	14 m					300Nm				
	15 m									
	17 m									
	20 m									
30 m										

1.4.2. Immersion depth

LENGTH OF THE POOL		WIDTH OF THE POOL								
		3m*	4m*	4.5m*	5m*	5.5m*	6m**	6.5m**	7m**	7.5m**
IMMERSION DEPTH OF THE SHAFT	0.5m	14m	14m	11m	9m	7m	20m	17m	15m	12m
		120N.m	120N.m	120N.m	120N.m	120N.m	300N.m	300N.m	300N.m	300N.m
	1m	20m	20m	20m	15m	12m	14m	12m	10m	8.5m
		300N.m	300N.m	300N.m	300N.m	300N.m	300N.m	300N.m	300N.m	300N.m
	1.5m	20m	18m	13m	10m	8m	8.5m	/	/	/
		300N.m	300N.m	300N.m	300N.m	300N.m	300N.m	/	/	/
	2m	14m	12m	8m	7m	5.5m	/	/	/	/
		300N.m	300N.m	300N.m	300N.m	300N.m	/	/	/	/

Data used to compile the table:


Cross-section of the roller shaft:

- *: Equivalent to that of an aluminium tube with an $\varnothing_{int}150 \times e=4$
- **: Equivalent to that of an aluminium tube with an $\varnothing_{int}150 \times e=10$

Characteristics of the cover:

- Lift: 100N/m²
- Weight of the blades: 40N/m²

This data is not guaranteed and can only be used for initial approximations. It cannot replace the user's experience.

		Immersed COVEO 120/300 Nm						Written by:	Checked by:	Page
								Name:	B. Maygron	E. Miralles
						Signature:				
Vers	Date	Vers	Date	Vers	Date	Vers	Date	File:	Product specifications	
00	02/12/13	03		06		09		11080		
01		04		07		10		N°: MU-5088-1-030		
02		05		08		11				

To be validated according to the type of blade, the type of shaft, the type of attachment, etc.

1.5. Cross-section of the motor cable

To guarantee that the motor turns sufficiently quickly, the drop in voltage between the supply unit and the motor must not exceed 2 Volts. The cross section of the wires in the motor power supply cable shall respect the recommended cross-sections according to the distance between the unit and the motor:

Coveo 120 Nm: (5A max)

Distance between the motor and the unit	10 m	20 m	30 m	40 m
Recommended cross-section	2.5 mm ²	2.5 mm ²	4 mm ²	6 mm ²

Coveo 300 Nm: (16A max)

Distance between the motor and the unit	10m	20m	30m	40m
Recommended cross-section	4 mm ²	6 mm ²	10 mm ²	12 mm ² (*)

*: non-standard cross-section.


These cross-sections are for maximum usage of the product. They can be reduced if consumption is lower (please contact us).


2. Product characteristics

2.1. Product composition

A COVEO is made up of a motorised waterproof IP68 cartridge (120Nm or 300Nm), fitted with the following parts:


- Drive and sliding bearings. These parts are mounted in the customer's roller shaft. This shaft and these bearings can be adjusted for an effortless installation. This adjustment is defined by the customer. The retaining screw can be removed to access these parts.
- A fixed shaft that links the motor to the flange or to the wall through a bearing. The articulation shaft that links the fixed shaft to the COVEO cartridge is mounted horizontally.

		Immersed COVEO 120/300 Nm						Written by:	Checked by:	Page	
								Name:	B. Maygron	E. Miralles	4/11
								Signature:			
Vers	Date	Vers	Date	Vers	Date	Vers	Date	File:	Product specifications N°: MU-5088-1-030		
00	02/12/13	03		06		09		11080			
01		04		07		10					
02		05		08		11					

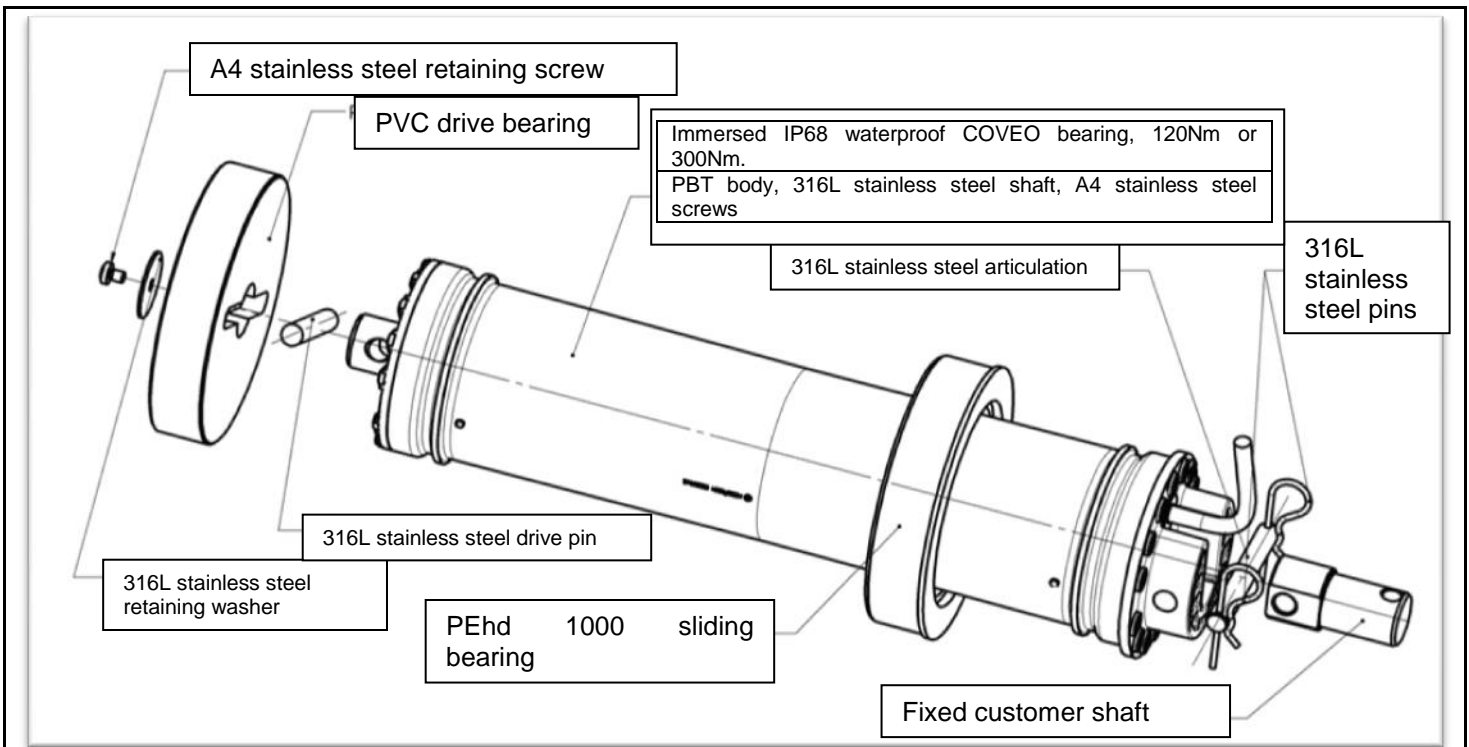

2.2. Space requirements

Standard space requirements plan of a COVEO motor.

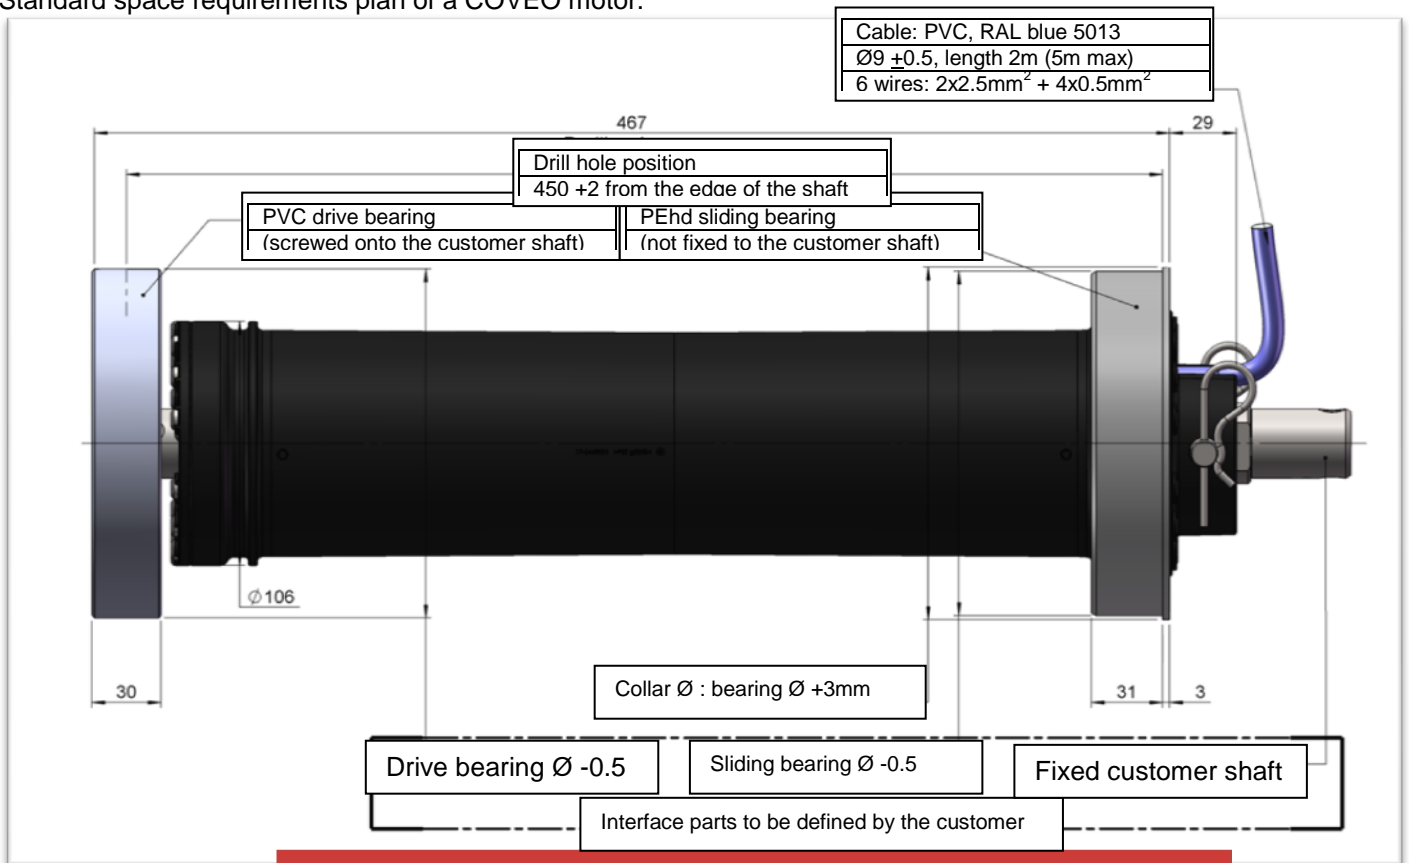

For reference:

Important: the PEhd sliding bearing must not be fixed to the customer's tube.

the fixed shaft that links the motor to the supporting bearing and the diameter and shape of the bearings may vary according to the customer's requirements. Each motor has a detailed space requirements drawing, validated by the customer.

		Immersed COVEO 120/300 Nm				Written by:		Checked by:		Page
						Name: B. Maygron		E. Miralles		5/11
Vers		Date		Vers		Date		Signature:		
00		02/12/13		03		06		File: 11080		
01				04		07		Product specifications		
02				05		08				
				09		10		N°: MU-5088-1-030		
				11						

2.3. Electromechanical characteristics

Characteristics of the immersed motors		120N.m	300N.m
Reduction ratio		1/886	1/516
Supply voltage of the SIREM unit		24Vdc (<30Vdc)	24Vdc(<30Vdc)
Consumption at max. torque ($\pm 20\%$)		5A	16A
Service: for the automatic cover roller, max. three successive cycles			
Max. torque		120N.m	300N.m
Speed ($\pm 20\%$)	Off load	5.5 rpm	9.0 rpm
	At max. torque	3.0 rpm	5.0 rpm
Motor shaft		316L stainless steel	316L stainless steel
Materials	Cartridge	PBT	PBT
EOT switches		Two square signals, offset by 90° One point per rev	
Magnetic brake (auto unlocking)		120N.m $\pm 10\%$ min.	300 N.m $\pm 10\%$ min.
Soft cable	Diameter	$\varnothing 9 \pm 0.5$	$\varnothing 9 \pm 0.5$
	Composition	2x2.5mm ² +4x0.5mm ²	2x2.5mm ² +4x0.5mm ²
	Waterproofing (as per NFC15100)	AD8	AD8
Max. permissible load on the motor		6,000 N (1)	
Conditions of use	Period of use	6 months/year	
	Number of cycles/day	2	2
	Max. pool length in shaft revs	12 shaft revs (2)	15 shaft revs (3)
	Operating water T°	0°C – 40°C	

(1): Max. covered surface: 120 m² (see chapter 1.3)

(2): For a covered length of 14m (see chapter 1.3)


(3): For a covered length of 20m (see chapter 1.3)

Values for reference only.


2.4. Operation

2.4.1. Connections:

The motor cable has six wires that are assigned as shown below.

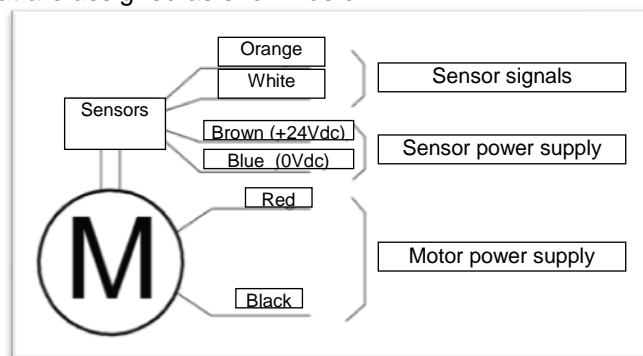

Connection in a waterproof junction box filled with gel or resin is compulsory.

		Immersed COVEO 120/300 Nm				Written by:		Checked by:		Page	
						Name: B. Maygron		E. Miralles		6/11	
Vers		Date		Vers		Date		Vers		Date	
00	02/12/13	03		06		09		Product specifications N°: MU-5088-1-030			
01		04		07		10					
02		05		08		11					

3. Standards

This product is designed to be incorporated in an automatic safety cover defined by the standard NFP 90308 (2006).

To this end, and in accordance with the European low-voltage directive 2006/95/EC, this motor complies with the following standards, when connected to the COVEO control unit 120/300:

- Immunity as per EN 55014-2:
- Emissions as per EN 55014-1 and EN 61000-6-3
- Electrical safety as per NF EN 60335-1


The electrical installation standards NFC15100, IEC 60334, or the local standards in the country of use only apply to the wiring between the components. Therefore, it is up to the installers to respect or enforce these standards.


The SIREM control unit of the immersed 120Nm and 300Nm COVEO systems supplies an SELV to the motor: safety extra low voltage <30Vdc as per NFC15100 or IEC 60364-7.

The control box must be installed outside volumes 0, 1 and 2.

4. Product identification

Manufacturer's plate on the motor cartridge.

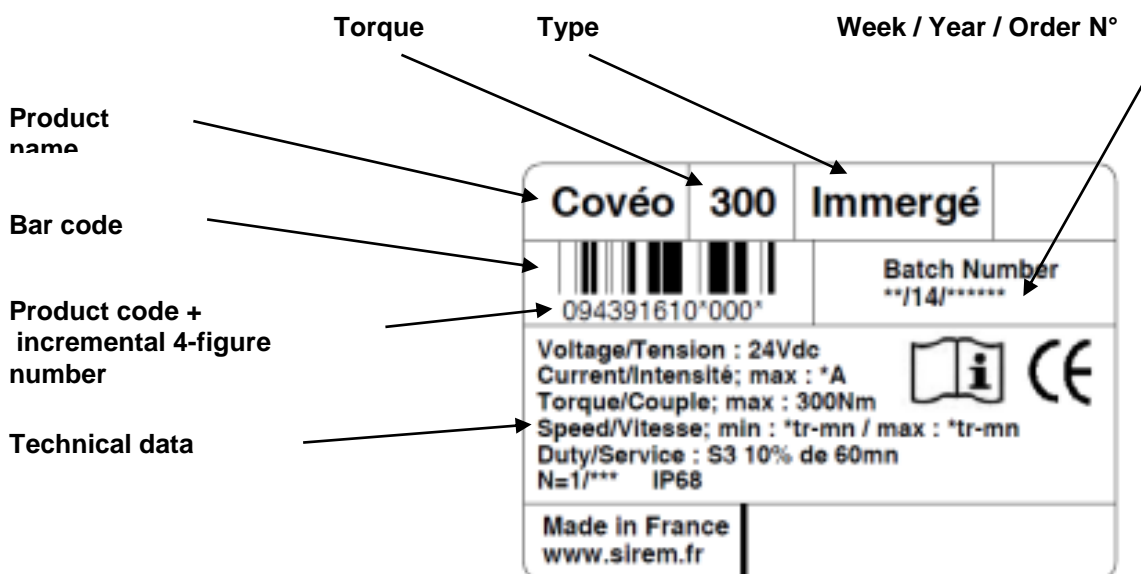


		Immersed COVEO 120/300 Nm						Written by:	Checked by:	Page
								Name:	B. Maygron	E. Miralles
								Signature:		
Vers	Date	Vers	Date	Vers	Date	Vers	Date	File:	Product specifications N°: MU-5088-1-030	
00	02/12/13	03		06		09		11080		
01		04		07		10				
02		05		08		11				

Warning

Important: failure to follow these instructions can result in serious injury

- The drive bearing (inner bearing) is the only bearing fixed to the tube to drive the shaft. The outer bearing (the bearing that turns on the motor) is not fixed to the tube (customer shaft).
- Attachment by four $\varnothing 6$ max radial screws (M6 max or equivalent). Respect the max. drilling depths shown on the product drawing. It shall obey the rules of the art and follow the recommendations for use for the preparation of the attachment: \varnothing of the pre-drilling hole, min drilling \varnothing for plastic screws. (refer to the screw manufacturer's data)
- All operations on the electrical system must be performed by qualified and authorised specialised electricians.
- The motor controls must only be operated by adults. Prohibit children from using them.
- Cables are not to be used for handling purposes. Handle the cables with care.
- In the event of damage, immobilise the system until it has been repaired.
- Place the system out of order and switch off the power supply during services and maintenance operations, and whenever work is done on the motor.
- When installing, make sure that the electric cable cannot be damaged. If an electric power supply cable is damaged, only the manufacturer is authorised to replace it.
- Never drill or weld in the vicinity of the reduction gear.
- Always protect the electrical connections with an IP68 box, gel or resin.

SIREM does not provide any guarantees and declines all liability in the event of material or bodily harm caused by its products in the event of misuse, failure to follow instructions, changes to the products and the use of the motors with unauthorised accessories made by other manufacturers.

		Immersed COVEO 120/300 Nm						Written by:	Checked by:	Page
								Name: B. Maygron	E. Miralles	9/11
Vers		Date	Vers	Date	Vers	Date	Vers	Date	File:	Product specifications N°: MU-5088-1-030
00	02/12/13	03		06		09		11080		
01		04		07		10				
02		05		08		11				

Declarations of compliance



DECLARATION OF "CE" CONFORMITY

We declare our products, COVEO (swimming pool cover motorisation) and its electric panel control box to be manufactured according to the following manufacturing standards:

- IEC 60-335-1:** Household and similar electrical appliances - Safety - Part 1.
- NF EN 55014-1:** Electromagnetic compatibility - Requirements for household appliances, electric tools and similar apparatus - Part 1: Emission.
- NF EN 61000-6-3:** Electromagnetic compatibility (EMC) - Part 6-3: Generic standards - Emission standard for residential, commercial and light-industrial environments.

IEC-CEI

and to be conformed to the requirements of standards subject to being assembled in compliance with their intended :

- 2006/95/CE** Low voltage directive
- 2004/108/EC** Electromagnetic compatibility directive

ADDITIONAL INFORMATION:

These products' design allow them to be used as a component in an assembly covered by the application of the NF P90-308 standards: protections for non ground pools closed to private use individually or collectively (Safety covers and gripping).

Marking: CE on the nameplate.

Saint-Maurice-de-Beynost, 06/03/2014.

G. MALPHETTES
CEO

B. MIRALLES
Technical Director

D. PERRADIN
Quality Manager

Chemin du Pilon - Saint Maurice de Beynost - 01708 MIRIBEL Cedex - FRANCE - Tél. : +33 (0)4 78 55 83 00 - Fax : +33(0)4 78 55 89 54
S.A.S au capital de 3 525 520 euros - RCS Bourg en Bresse - SIREN 351 138 189 - Code APE 2711Z - N°TVA FR 48 351 138 189



		Immersed COVEO 120/300 Nm						Written by:		Checked by:		Page
								Name:		B. Maygron		E. Miralles
Vers		Date		Vers		Date		Signature:		Product specifications		
00		02/12/13		03		06		File:				
01				04		07		11080				
02				05		08		11				
N°: MU-5088-1-030												



Compliance Declaration to the 2002/95/CE Directive

We certify that the below listed products are conform to the Directive:

RoHS 2002/95/CE OF THE EUROPEAN PARLIAMENT AND COUNCIL dated 27 January 2003

(Restriction on hazardous substances in electrical and electronic equipment)

Our Swimming Pool Cover Motorisations model: COVEO

Are free of:

- Lead (less than 0.1 % of the weight)
- Mercury (less than 0.1 % of the weight)
- Cadmium (less than 0.1 % of the weight)
- Chromium (less than 0.1 % of the weight)
- PBB, PBDE (less than 0.1% of the weight)

St Maurice de Beynost, 06-03-2014

Emmanuel MIRALLES
Technical Manager

Damien PERRADIN
Quality Manager

Chemin du Pilon – Saint Maurice de Beynost – 01708 MIRIBEL Cedex – FRANCE – Tél. : +33 (0)4 78 55 83 00 – Fax : +33(0)4 78 55 89 54
S.A.S au capital de 3 525 520 euros – RCS Bourg en Bresse – SIREN 351 138 169 - Code APE 2711Z – N°TVA FR 48 351 138 169



		Immersed COVEO 120/300 Nm						Written by:	Checked by:	Page
								Name:	B. Maygron	E. Miralles
Vers	Date	Vers	Date	Vers	Date	Vers	Date	Signature:	Product specifications	
00	02/12/13	03		06		09		File:		
01		04		07		10		11080		
02		05		08		11		N°: MU-5088-1-030		