

TYPE

# RDC 215





## DESTINATION


- Industrial applications
- Machine tools

## DISCRIPTION

- Hollow shaft tachometer generator: rotor / stator set
- Permanent magnet excitation
- Collector on opposite of mounting side
- Several options
- **SILVER COLLECTOR**

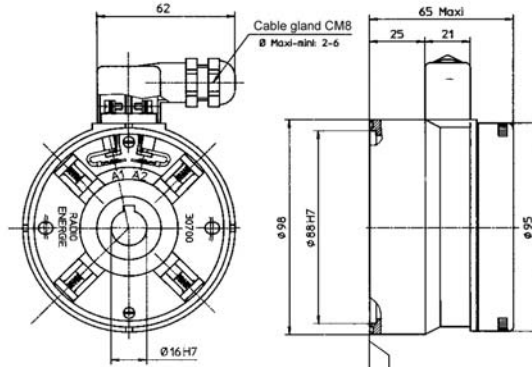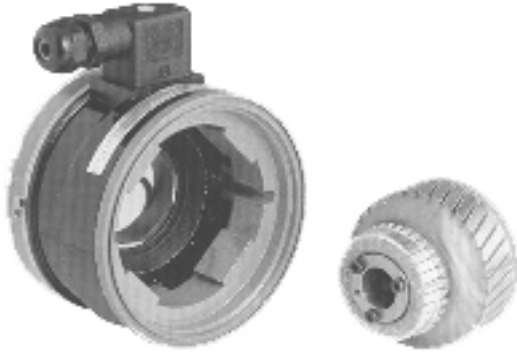

**RDC 215 KE**

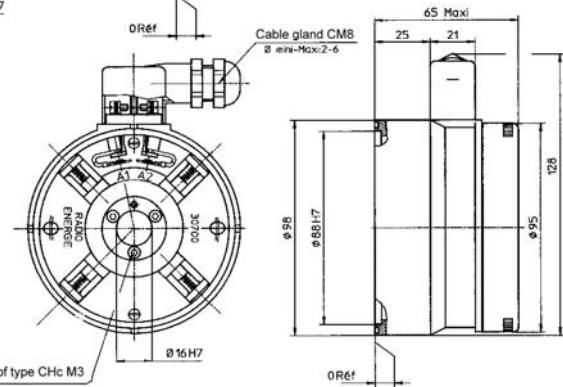

**RDC 215 ME**

Weight	kg	1,2
--------	----	-----

Armature fixing: 3 screws of type CHc M3  
Recommended torque: 140 N.cm

## GENERAL DATA

Designation	Symbol	Unit	Value
Maximum speed (mechanical)	$n_m$	U/min.	7500
Moment of inertia	J	kg cm <sup>2</sup>	1,8
No load driving torque	$M_r$	N. cm	≤ 0,5
Maximum E.M.F.	$E_m$	V	3000
Maximum linearity error	$\Delta E$	% $E_T$	≤ 0,15
Overall ripple rate (peak to peak)	$\Delta E_C$	% $E_C$	≤ 0,5
Rotation harmonics (f = 2 p. n.)	$\Delta E_P$	% $E_C$	≤ 0,05
Slot harmonics (f = Z. n.)	$\Delta E_Z$	% $E_C$	≤ 0,45
Calibration precision	$\Delta E_O$	% $E_{T0}$	± 2,0
E.M.F. temperature drift - not compensated - compensated	$\Delta E_e$	% /°C	0,03
Time constant	Ct	ms	0,6
*Filter: Time constant	RF x CF	ms	0,1
Load current	$I_C$	mA	1,5
Speed	n	U/min.	3000

Construction Details	
Number of poles	4
Number of armature slots	33
Number of collector blades	33
Insulation class	B (IEC 34-1)
Operating temperature	-20° - 80 °C
Climatic protection	C <sub>a</sub> (IEC 68-1)
Protection degree	IP00 (IEC 34-5) bis IP68 (DIN 40050)**
Direction of rotation	Reversible
Excitation	Permanent magnets SmCo

\* Filter-connection diagram see following pages

\*\* The protection degree refers to a mounted machine

Rev.: 02

We reserve the right to modify technical features in the interest of technical advance.

**DESTINATION**

- Industrial applications
- Machine tools

**DISCRIPTION**

- Hollow shaft tachometer generator: rotor / stator set
- Permanent magnet excitation
- Collector on opposite of mounting side
- Several Options
- **SILVER COLLECTOR**

TYPE  
RDC 215

**Mechanical options**

Armature bore Ø d (mm)			Motor-centring end frame Ø D (mm)			Armature clamping device
Standard	Max.	Min.	Standard			
16 <sup>H7</sup>	16	8	88			Key or expanding device

**Options****Available Options****Markings and Polarity of Terminals (cables) for counter clockwise rotation viewing the mounting face**

1 collector	2 collector
A1: + - A2: -	

**Electrical Options**

			Min.					Max.						
E.M.F. at 1000 rpm.	E <sub>n</sub>	V	10	20	30	40	50	60						
Voltage gradient	C <sub>v</sub>	V/rpm	0,01	0,02	0,03	0,04	0,05	0,06						
Armature resistance	R <sub>a</sub>	Ω	5	24	36	62	97	130						
Max. thermal load	I <sub>th</sub>	A	280	170	106	82	66	59						
Max. allowed speed	n <sub>a</sub>	rpm	7500	7500	7500	7500	6000	5000						

**Brushes**


Number	Size	Quality	Application limits	Reference
4	4 x 6 x 13	Electro-graphite (EG)	Special applications, on request	
		Silver-graphite (CA)	STANDARD for normal use at E.M.F. < 300 V	60 - 40 - CA

Rev.: 02


We reserve the right to modify technical features in the interest of technical advance.

# MOUNTING INSTRUCTION


RDC 215 KE /KF

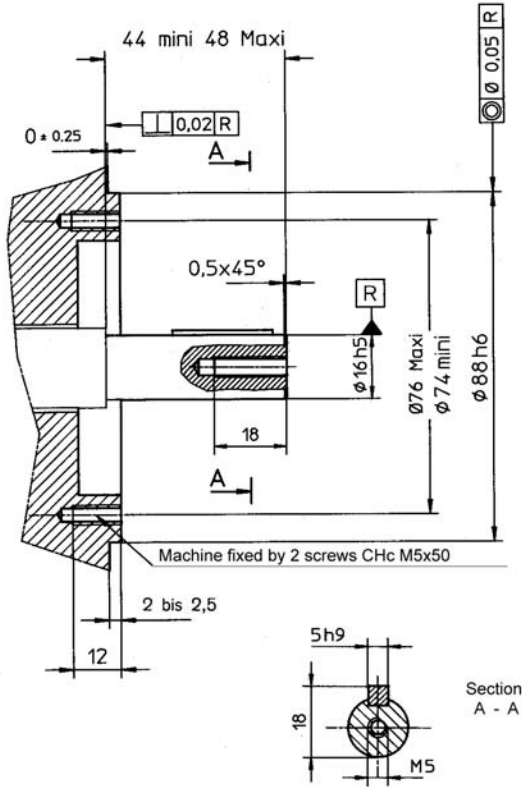

RDC 215 ME /MF

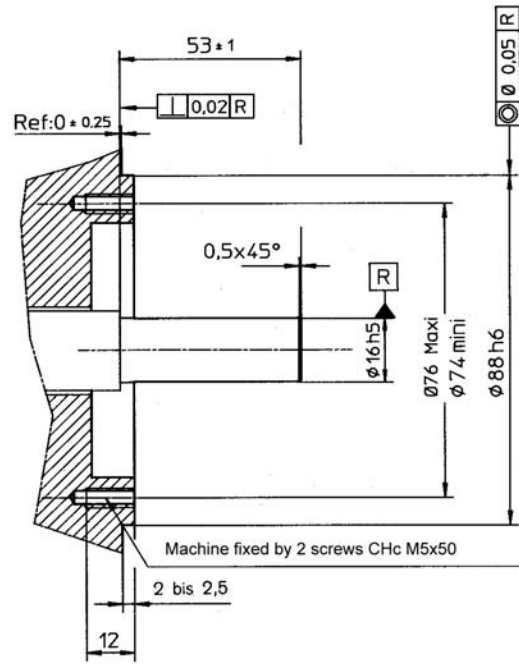

## Filter Scheme

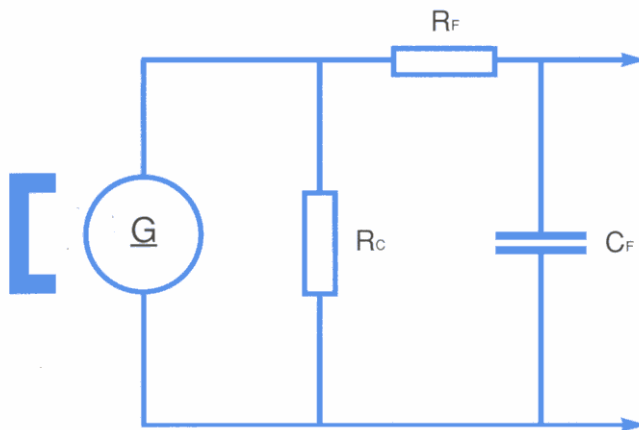

$R_C$ : Load resistance  
 $R_F$ : Filter resistance  
 $C_F$ : Filter capacity