

**TYPE**

# RDC 16



## DESTINATION


- Industrial applications
- Machine tools

## DISCRIBTION

- Hollow shaft tachometer generator: rotor / stator set
- Permanent magnet excitation
- Sturdy machine, metal housing
- Collector on opposite of mounting side
- Mounted on smooth shaft



Weight	kg	1,8
--------	----	-----

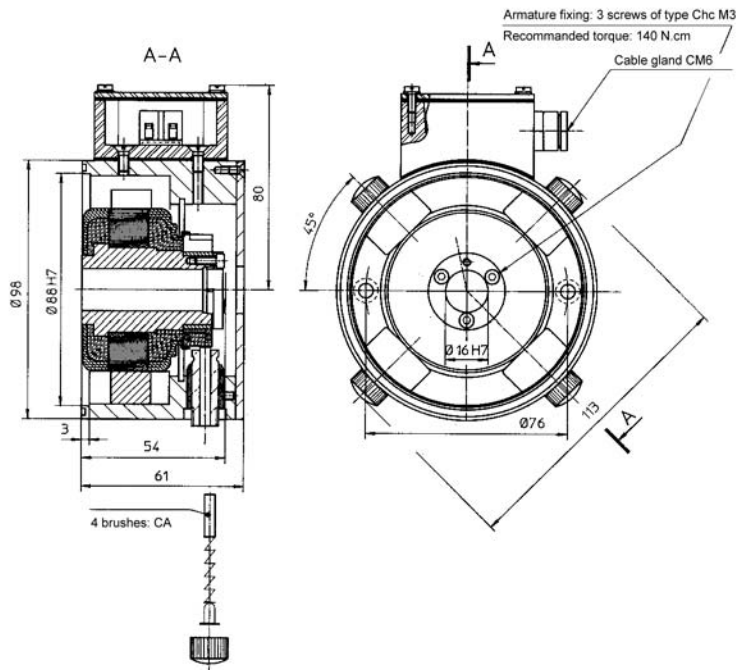

## GENERAL DATA

Designation	Symbol	Unit	Value	
Maximum speed (mechanical)	$n_m$	rpm	7500	
Moment of inertia	J	Kg cm <sup>2</sup>	1,8	
No load driving torque	$M_r$	N. cm	≤ 0,5	
Maximum E.M.F.	$E_m$	V	300	
Maximum linearity error	$\Delta E$	% $E_T$	≤ 0,15	
Overall ripple rate (peak to peak)	$\Delta E_C$	% $E_C$	≤ 0,6	
Rotation harmonics (f = 2 p. n.)	$\Delta E_P$	% $E_C$	≤ 0,05	
Slot harmonics (f = Z. n.)	$\Delta E_Z$	% $E_C$	≤ 0,55	
Calibration precision	$\Delta E_O$	% $E_{T0}$	± 2,0	
E.M.F. temperature drift - not compensated - compensated	$\Delta E_e$	% /°C	0,005	
Time constant	$C_t$	ms	0,7	
*Filter:	RF x CF	ms	0,1	
	$I_C$	mA	1,5	
	n	rpm	3000	

Construction Details	
Number of poles	4
Number of armature slots	33
Number of collector blades	33
Insulation class	B (IEC 34-1)
Operating temperature	-20° - 110 °C
Climatic protection	C <sub>a</sub> (IEC 68-1)
Protection degree	IP 44 u. IP 55 (IEC 34-5)**
Direction of rotation	Reversible
Excitation	Permanent magnets Alnico

\* Filter-connection diagram see following pages  
 \*\* The protection degree refers to a mounted machine

Rev.: 01

**DESTINATION**

- Industrial applications
- Machine tools

**DISCRIBTION**

- Hollow shaft tachometer generator: rotor / stator set
- Permanent magnet excitation
- Sturdy machine, metal housing
- Collector on opposite of mounting side
- Mounted on smooth shaft

TYPE  
RDC 16

**Mechanical options**

Armature bore Ø d (mm)			Motor centring end frame Ø D (mm)			Armature clamping device
Standard	Max.	Min.	Standard			
16 <sup>H7</sup>	16	14	88			Expanding device

**Options**

Waterproof version (ME):IP 55

**Available options**

- On request

**Markings and Polarity of Terminals (cables) for counter clockwise rotation viewing the mounting face**

1 collector	2 collector
A1: + - A2: -	

**Electrical options**

			Min.					Max.					
E.M.F. at 1000 rpm.	E <sub>n</sub>	V	10	20	30	40	50	60					
Voltage gradient	C <sub>v</sub>	V/rpm	0,01	0,02	0,03	0,04	0,05	0,06					
Armature resistance	R <sub>a</sub>	Ω	8	33	73	130	200	290					
Max. thermal load	I <sub>th</sub>	A	400	200	150	100	80	60					
Max. allowed speed	n <sub>a</sub>	rpm	7500	7500	7500	7500	6000	5000					


**Brushes**

Number	Size	Quality	Application limits	Reference
4	6,4 x 5 x 14	Electro-graphite (EG)	Special applications, on request	
		Silver-graphite (CA)	STANDARD for normal use at E.M.F. < 300 V	64 - 50 - CA


Rev.: 01

We reserve the right to modify technical features in the interest of technical advance.

# MOUNTING INSTRUCTION

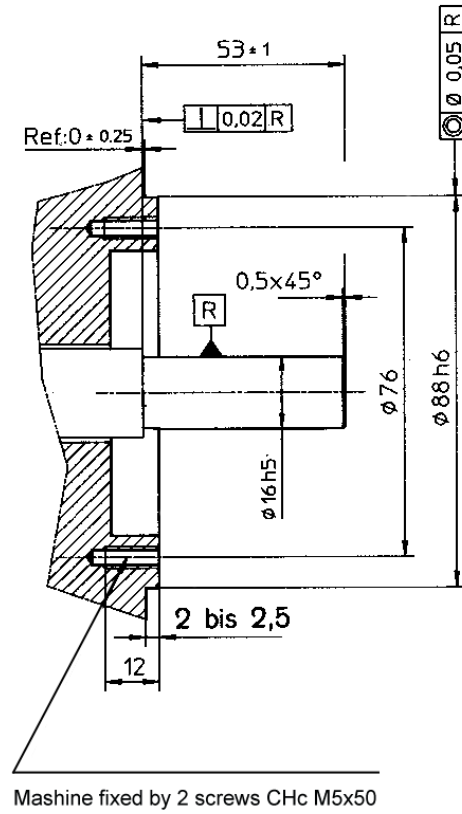

## Filter Scheme

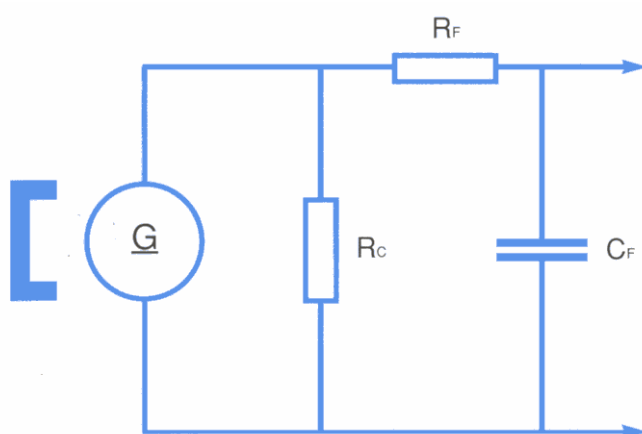

$R_C$ : Load resistance  
 $R_F$ : Filter resistance  
 $C_F$ : Filter capacity